


RECOMMENDED PANEL CUTOUT
PANEL THICKNESS 1.0 - 11.0 [.04 - .43 in]




▲ FLAT
ACTUATOR FINISH:
STAINLESS STEEL

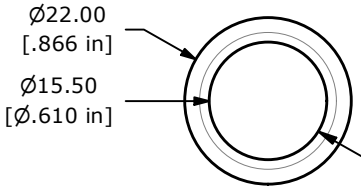


▲


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

(ON) = MOMENTARY




▲ DPDT
CONTACT CONFIGURATION

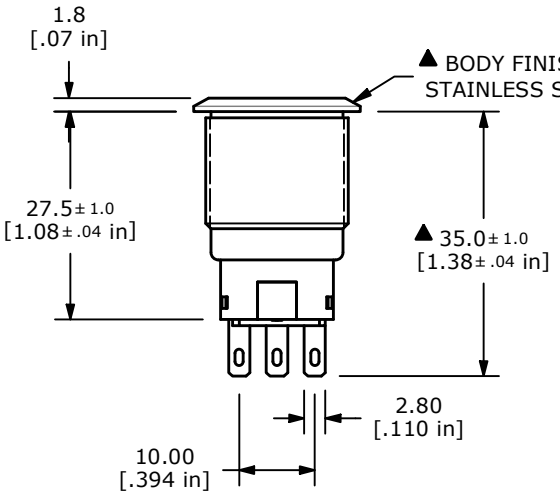

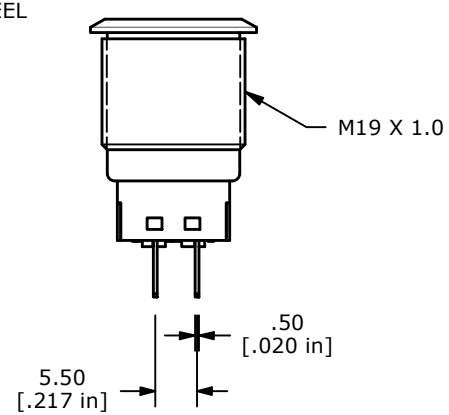

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: GOLD
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -40°C TO 85°C
11. TRAVEL: 2.5 [.10 in]
12. ▲ DENOTES CRITICAL PARAMETER
13. INGRESS PROTECTION: IP67
▲ 14. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
▲ 15. ILLUMINATION VOLTAGE: NO LAMP



REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-104373	TERMINAL DIM TO 27.5 AND 35.0	09/23/26	MR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000002672

TITLE PV4F2H0SSG

SCALE	DATE	DR	DWG	REV
1:1	8/24/2017	MW	52-PV4F2H0SSG	C