

SHEET 1 OF 1




PANEL CUTOUT
MAX. PANEL THICKNESS 6mm

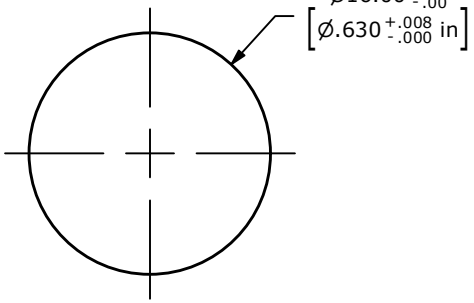

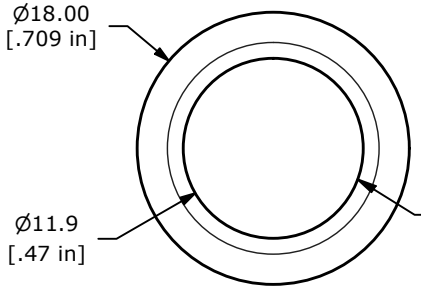



▲ SWITCH FUNCTION	
POS. 1	POS. 2
	
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY



SPST
CONTACT CONFIGURATION

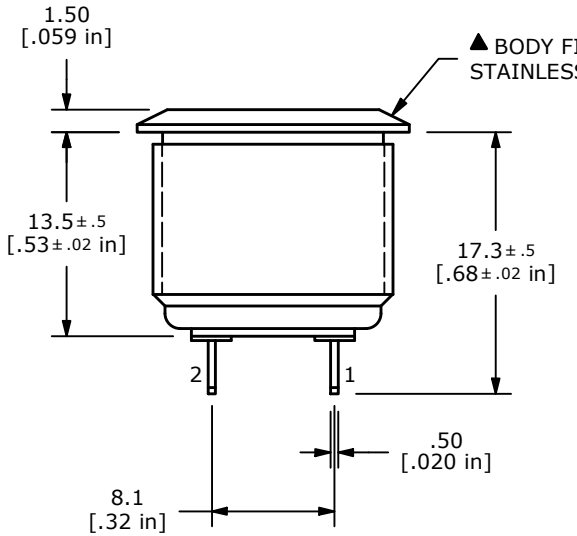

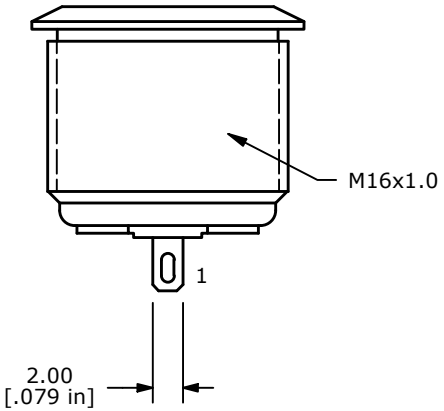

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. CONTACT MATERIAL: SILVER PLATED
5. RATING: 2A 48VDC
6. ELECTRIC LIFE: 50,000 CYCLES
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
▲11. TRAVEL: 1.8mm
12. ▲DENOTES CRITICAL PARAMETER.
▲13. ILLUMINATION COLOR: NONE
14. HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)
15. INGRESS PROTECTION: IP65

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-104084	DIM 8.1 WAS 9.4	05/14/26	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000002853

TITLE PV6F240SS

SCALE	DATE	DR	DWG	REV
2:1	7/24/2012	rc	52-PV6F240SS	C