


SHEET 1 OF 1



RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 12mm

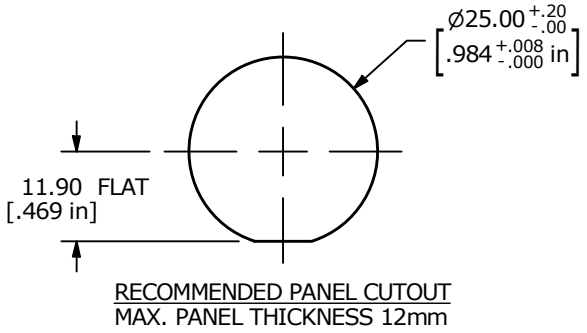


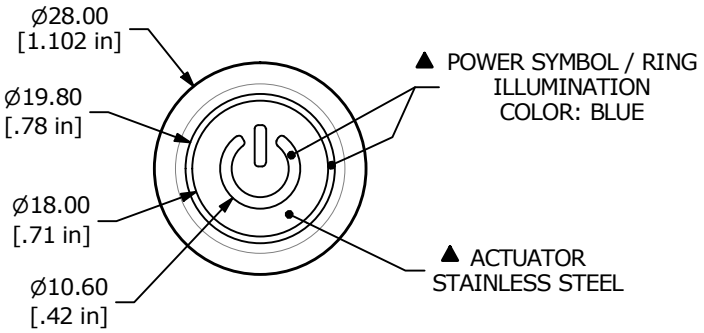

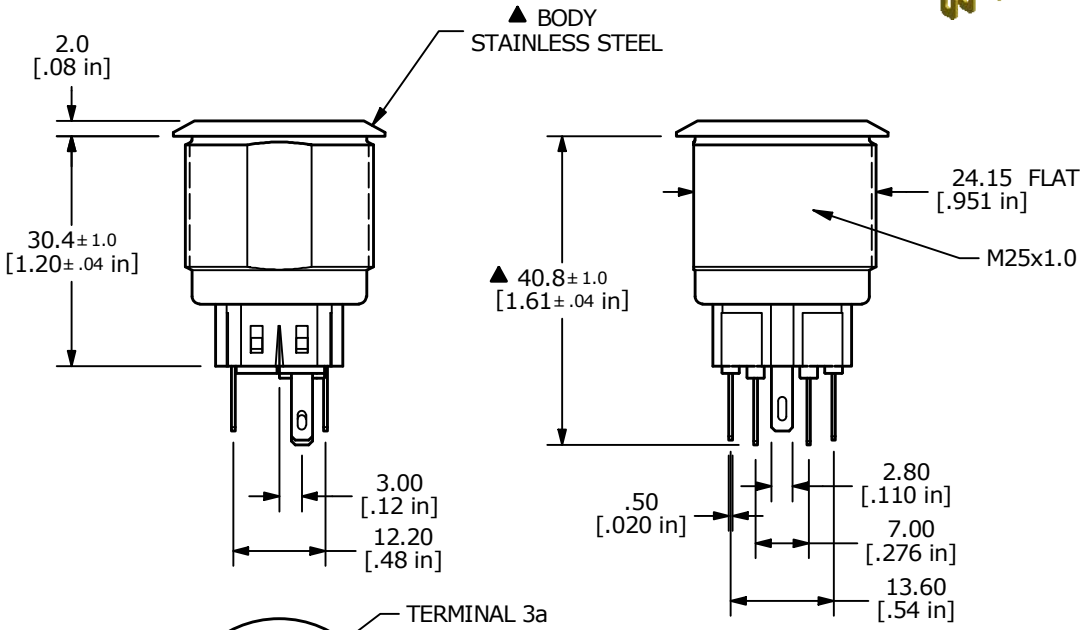


▲ SWITCH FUNCTION	
POS. 1	POS. 2
	
1a-2a	(3a-4a)

( ) = MOMENTARY



▲ SPDT ON (OFF) / OFF (ON)
CONTACT CONFIGURATION

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 2A @ 48VDC
▲ 5. ILLUMINATION VOLTAGE: 2.8V
6. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
7. INSULATION RESISTANCE: 1,000MΩ @ 500VDC
8. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. OPERATING TEMPERATURE: -20°C to 55°C
11. INGRESS PROTECTION: IP65
▲ 12. SUPPLIED HARDWARE: O-RING AND HEXNUT
13. ▲ DENOTES CRITICAL PARAMETER

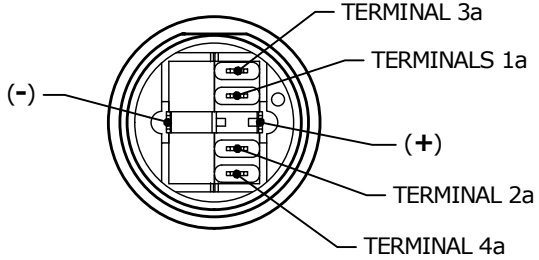

REV	PCR NO	DESCRIPTION	DATE	BY
A	24720	RELEASE	2/1/21	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE PV8F2Y0SS-341-M14

SCALE	DATE	DR	DWG	REV
1:1	2/1/2021	MW	52-PV8F2Y0SS341M14	A