


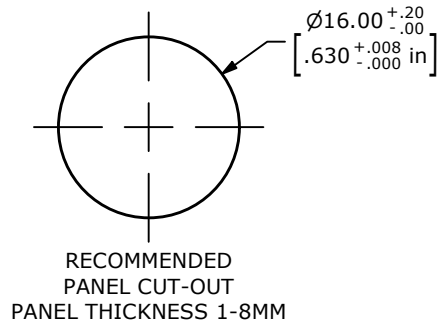


SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
C - NC	C - NO

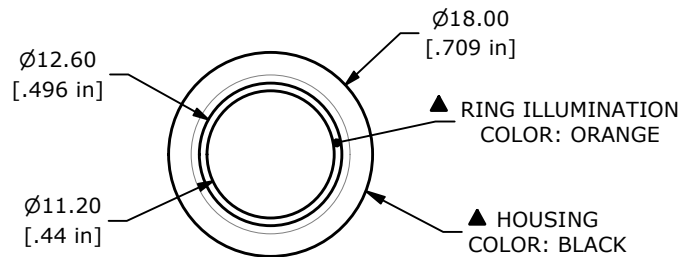



NOTE:

1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 36VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX.
10. OPERATING TEMP.: -25°C to 55°C
11. TRAVEL: 3.0mm
12. ▲ DENOTES CRITICAL PARAMETER
13. ACTUATION FORCE: 1.7N NOMINAL
14. INGRESS PROTECTION: IP65
15. HARDWARE SUPPLIED: O-RING AND HEXNUT
- ▲ 16. LAMP VOLTAGE: 1.8V

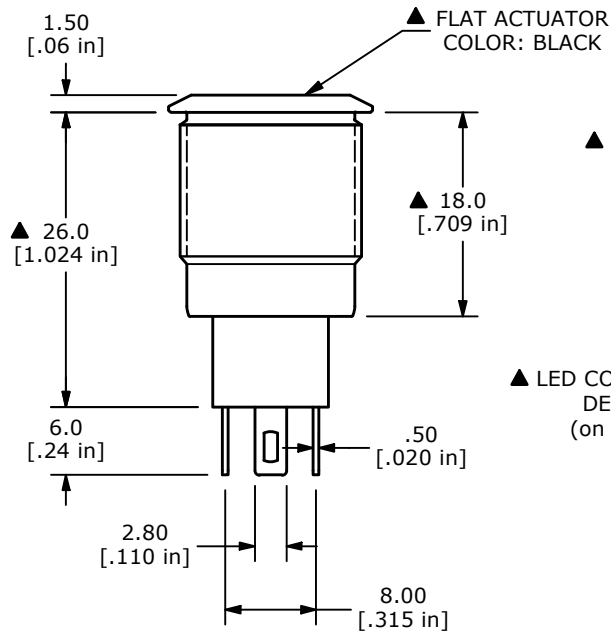

▲ M16 x 1.0
THREAD

▲ LED COLOR / VOLTAGE
DESIGNATION
(on Term. Block)

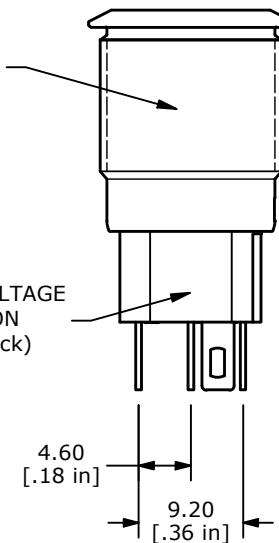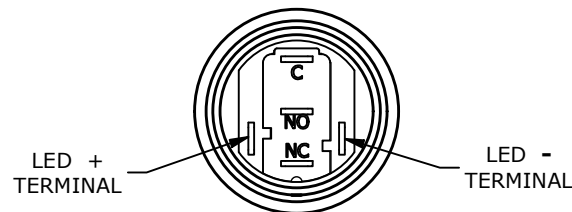

C	24574	UPDATE THREAD LENGTH TO 13.4	11/2/20	JM
B	23928	correct note 16	6/13/19	MW
A	23861	Release	4/23/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE PVA3F23011321

SCALE 3:2	DATE 4/23/2019	DR MW	DWG 52-PVA3F23011321	REV C
--------------	-------------------	----------	-------------------------	----------