


SHEET 1 OF 1

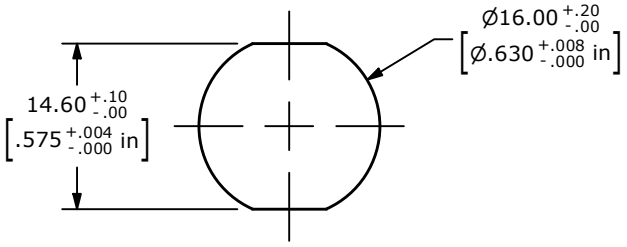



RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 7.0 [.275 in]

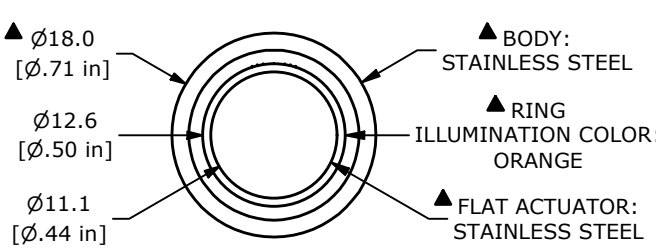


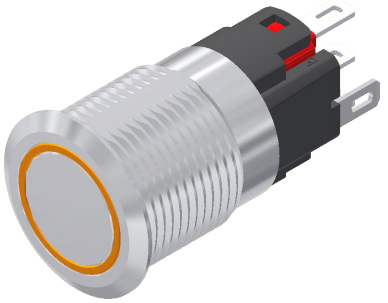



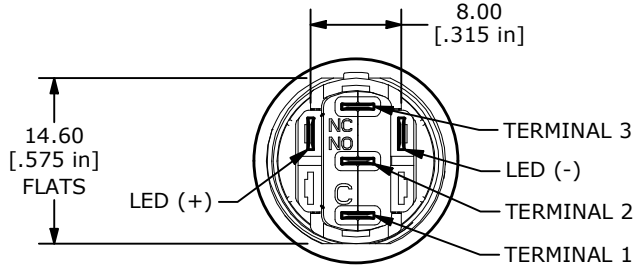
| ▲ SWITCH FUNCTION | |
|---|---|
| POS. 1 | POS. 2 |
| ON | (ON) |
| 1-3 | 1-2 |




▲ SCHEMATIC
1P ON - ON

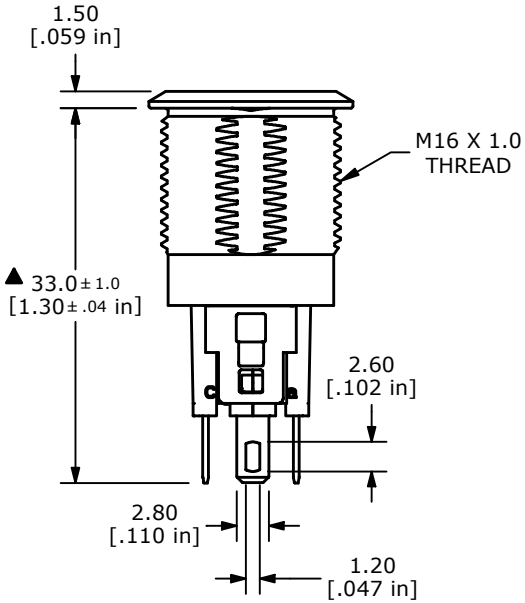

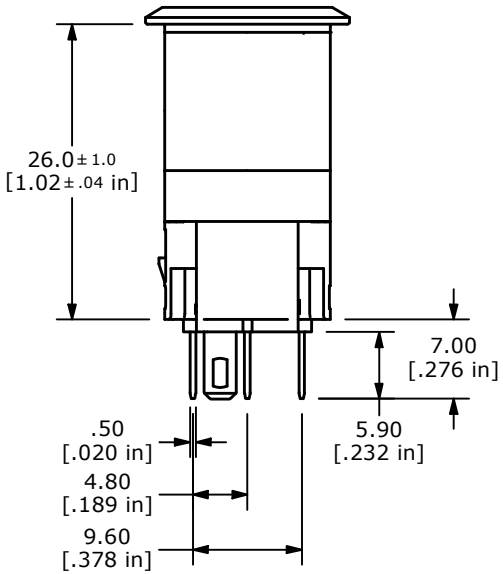
NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A, 24VDC / 5A, 250VAC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 100 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX.
▲ 10. OPERATING TEMP.: -40°C to +85°C (NO FREEZING, KEEP THE AIR FLOWING AROUND THE PUSHBUTTON).
▲ 11. ▲ DENOTES CRITICAL PARAMETER.
▲ 12. HARDWARE SUPPLIED: O-RING AND HEXNUT
▲ 13. INGRESS RATING: IP67
▲ 14. LAMP VOLTAGE: 6V ORANGE

| REV | ECO NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| B | ECO-103144 | 5.90 DIM, 0.5mA 220VAC TO 5A 250VAC, & IP67 | 01/14/25 | MR |
| | | | | |
| | | | | |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E-SWITCH®

OBJECT ID 100125994

TITLE PVB3F230SS323

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 3:2 | 10/25/2023 | JS | 52-PVB3F230SS323 | B |