

SHEET 1 OF 1




RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 7.0 [.275 in]

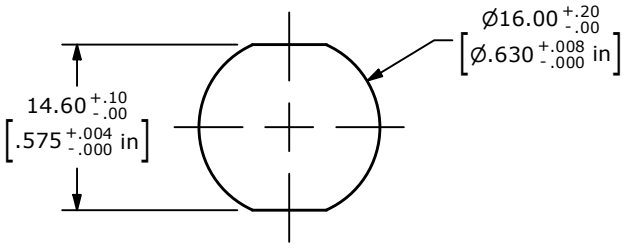


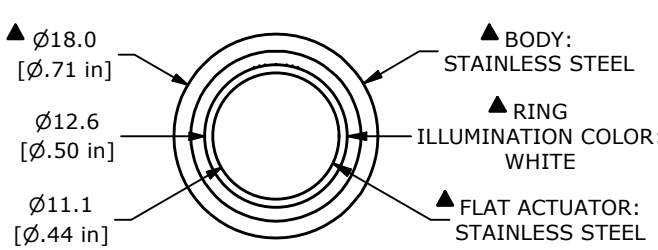



▲ SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2



▲ SCHEMATIC
1P ON - (ON)
( ) DENOTES MOMENTARY

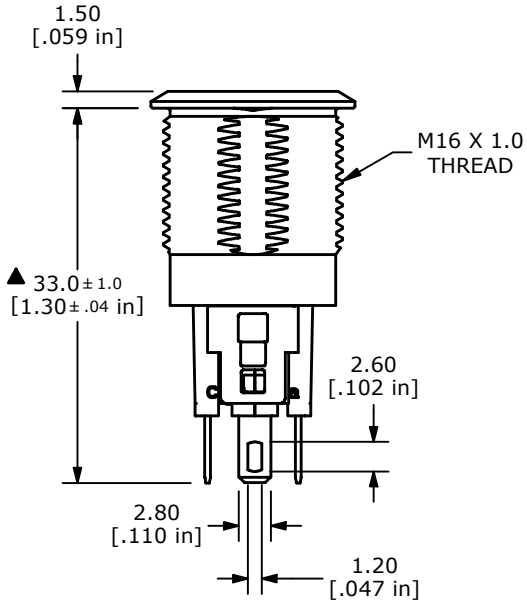

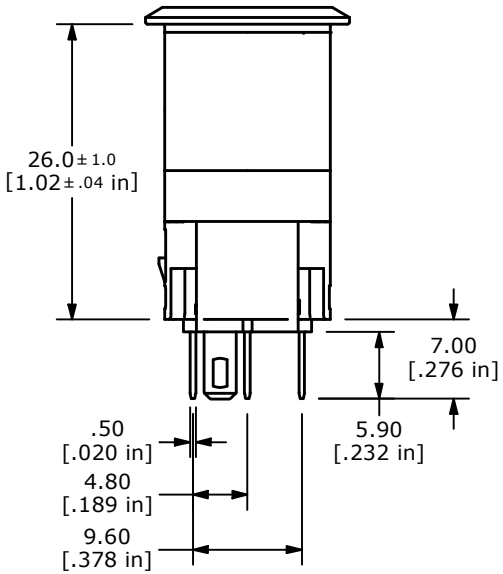

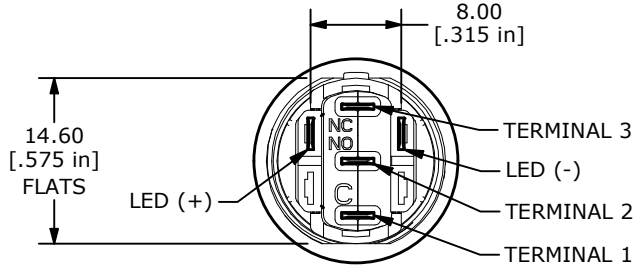

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A, 24VDC / 1.5A, 250VAC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 100 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX.
▲ 10. OPERATING TEMP.: -40°C to +85°C (NO FREEZING, KEEP THE AIR FLOWING AROUND THE PUSHBUTTON).
▲ 11. ▲ DENOTES CRITICAL PARAMETER.
▲ 12. HARDWARE SUPPLIED: O-RING AND HEXNUT
▲ 13. INGRESS RATING: IP67
▲ 14. LAMP VOLTAGE: 2.8V WHITE

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-103144	5.90 DIM, 0.5mA 220VAC TO 1.5A 250VAC, & IP67	01/14/25	MR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 100126101

TITLE PVB3F2B0SS301

SCALE	DATE	DR	DWG	REV
3:2	10/26/2023	JS	52-PVB3F2B0SS301	B