

SHEET 1 OF 1




PANEL CUTOUT
MAX. PANEL THICKNESS
10.0mm [.43]

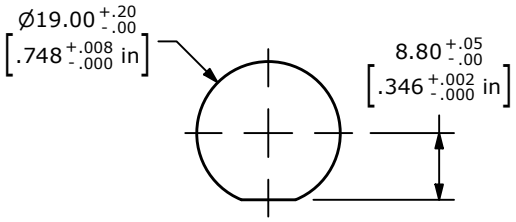

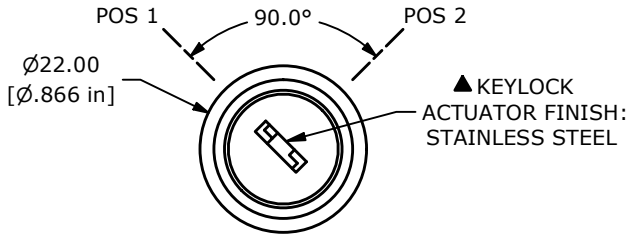



▲

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-3	1-2




▲ SPDT ON-ON
CONTACT CONFIGURATION

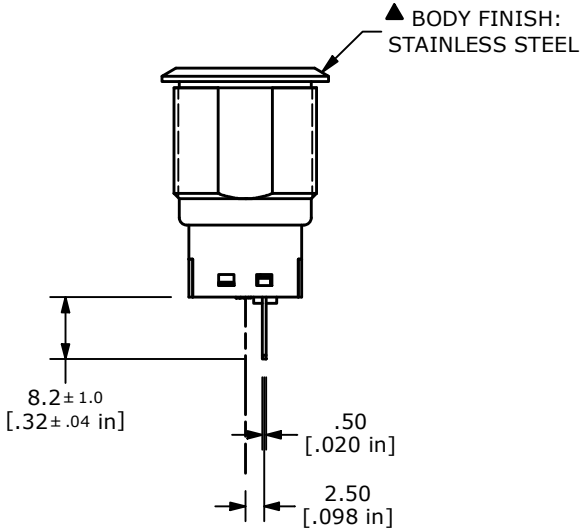

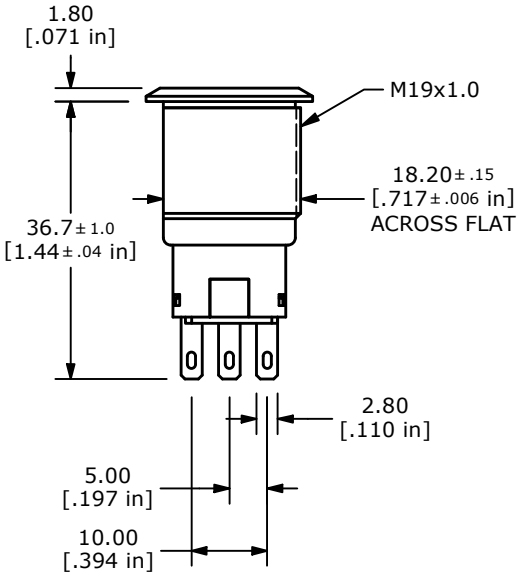

NOTE:
1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
▲ 12. INGRESS PROTECTION: IP65
▲ 13. HARDWARE SUPPLIED: KEY, O-RING, AND HEXNUT



REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-103528	PRINT UPDATE	07/14/25	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 100122500

TITLE PVK4K21A0SS

SCALE	DATE	DR	DWG	REV
1:1	9/6/2022	MJR	52-PVK4K21A0SS	C