


PANEL CUTOUT
MAX. PANEL THICKNESS
10.0mm [.43]




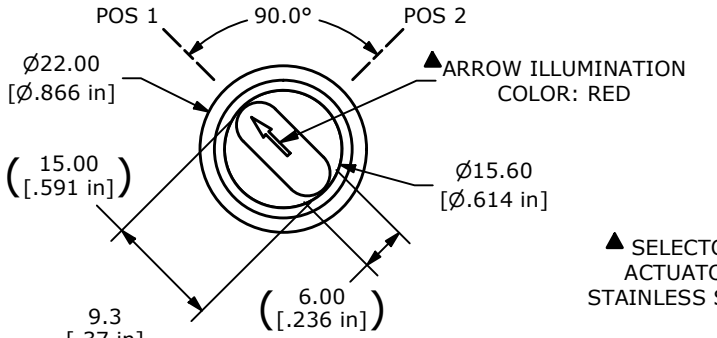


▲


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5


( ) DENOTES MOMENTARY






▲ DPDT ON-(ON)
CONTACT CONFIGURATION

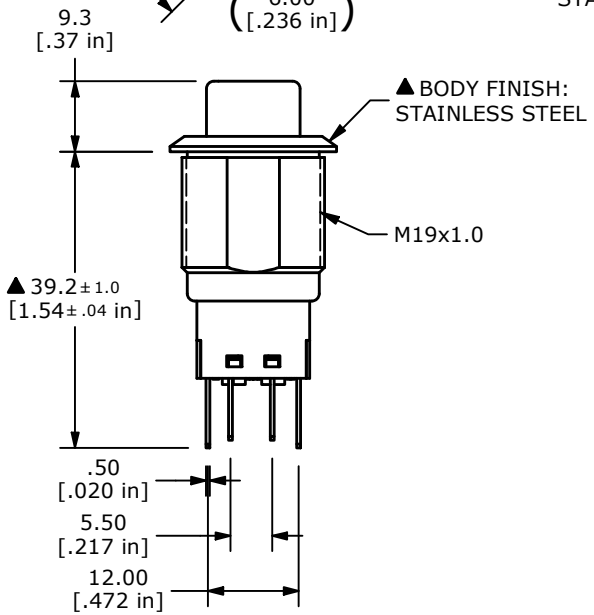

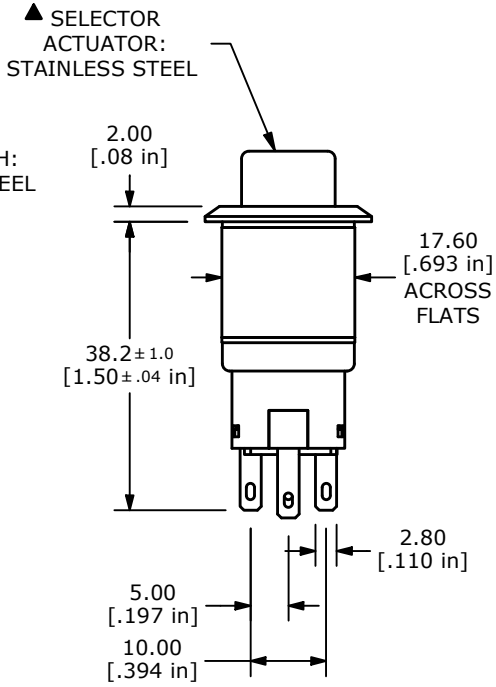

NOTE:
1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
▲ 12. LAMP VOLTAGE: 1.8V
▲ 13. INGRESS PROTECTION: IP40
▲ 14. HARDWARE SUPPLIED: O-RING AND HEXNUT

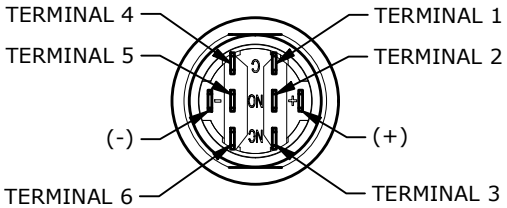

REV	ECO NO	DESCRIPTION	DATE	BY
F	ECO-103981	IP40 WAS IP65	03/16/26	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 100122465

TITLE PVK4S22B0SS-A11

SCALE	DATE	DR	DWG	REV
1:1	7/29/2022	MJR	52-PVK4S22B0SSA11	F