


ADAPTER	WIRE	LENGTH
SW1-1 (+)	WIRE, 24 AWG AWM UL1061, RED	150.0 [5.9 in]
SW1-2 (-)	WIRE, 24 AWG AWM UL1061, BLACK	150.0 [5.9 in]




RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 6mm

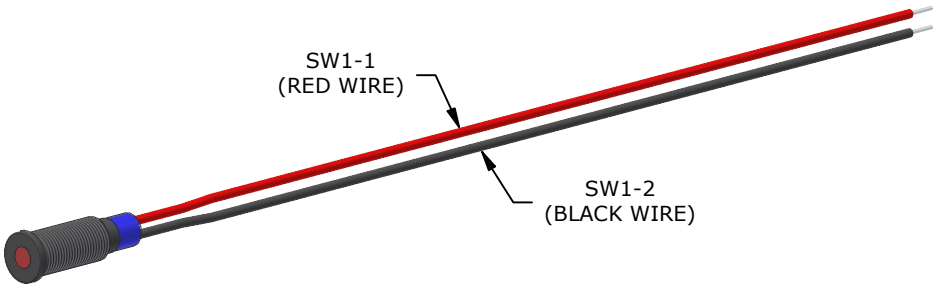

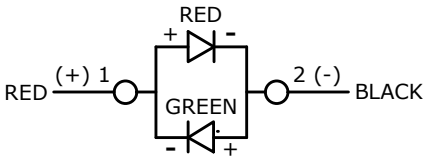

LED SCHEMATIC

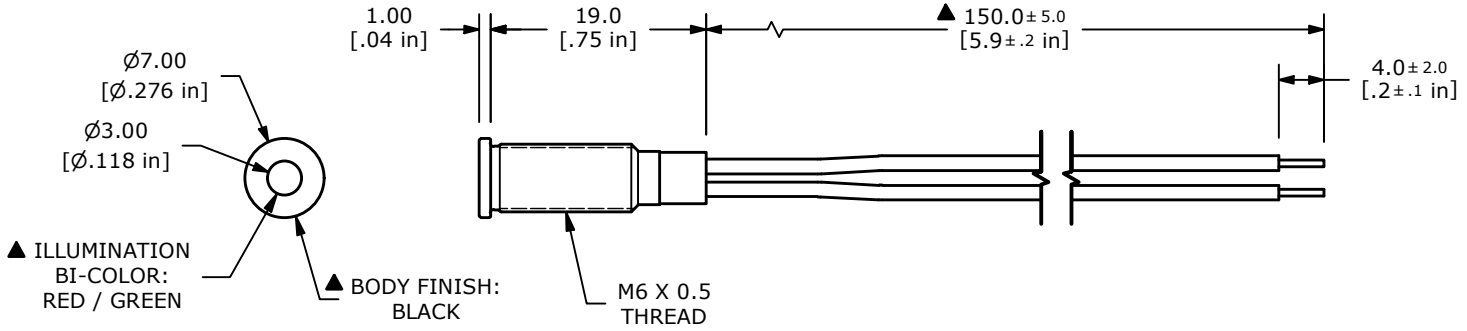

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. OPERATING TEMP: -40°C to 85°C
5. CURRENT RATING: 2mA-20mA
▲ 6. LAMP VOLTAGE: RED 1.8V, GREEN 2.8V
7. IP RATING: IP67
8. ▲ DENOTES CRITICAL PARAMETER.
9. HARDWARE SUPPLIED: O-RING AND HEXNUT

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-104069	print update	04/24/26	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000003257

TITLE PVL06FW1G1

SCALE	DATE	DR	DWG	REV
3:2	1/19/2021	MW	52-PVL06FW1G1	B