



SHEET 1 OF 1

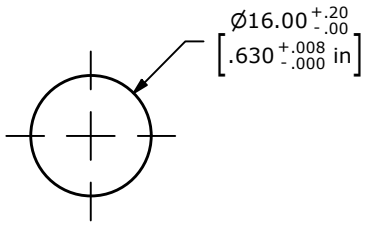


RECOMMENDED
PANEL MOUNTING
1-10mm THICKNESS

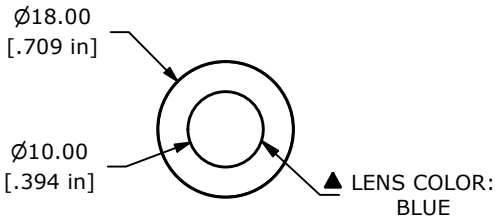





LED SCHEMATIC

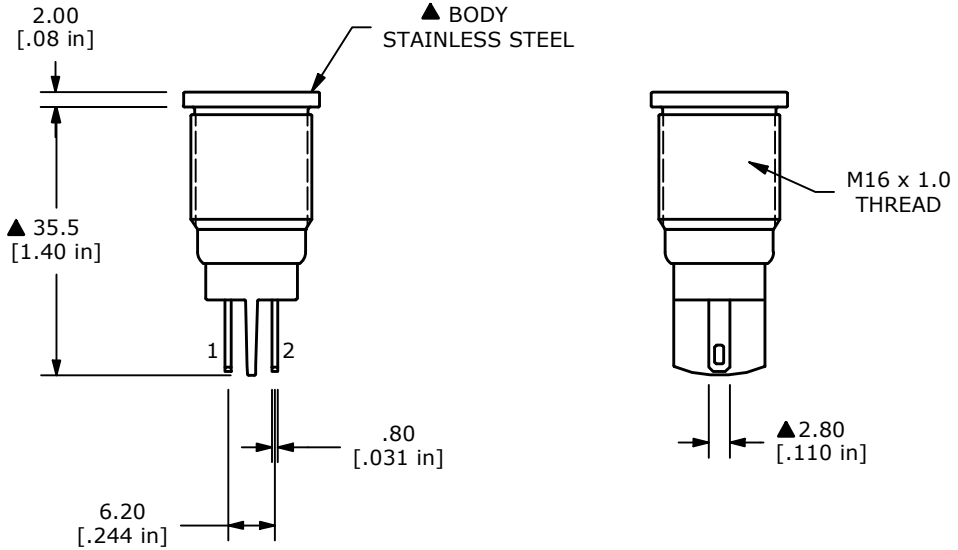

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. OPERATING TEMP: -40°C to 85°C
5. CURRENT RATING: 2mA-20mA
▲6. LAMP VOLTAGE: 2.8V
7. IP RATING: IP67
8. ▲ DENOTES CRITICAL PARAMETER.
9. HARDWARE SUPPLIED: O-RING AND HEXNUT

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-104191	CORRECT PANEL THICKNESS	06/22/26	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000003283

TITLE PVL16FLS41

SCALE	DATE	DR	DWG	REV
1:1	1/27/2016	rc	52-PVL16FLS41	C