

SHEET 1 OF 1




RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 10mm

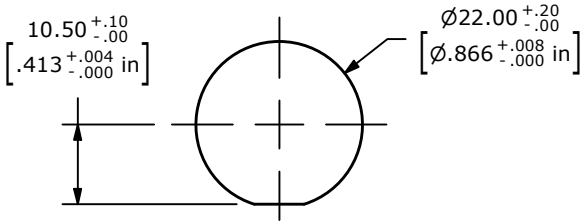

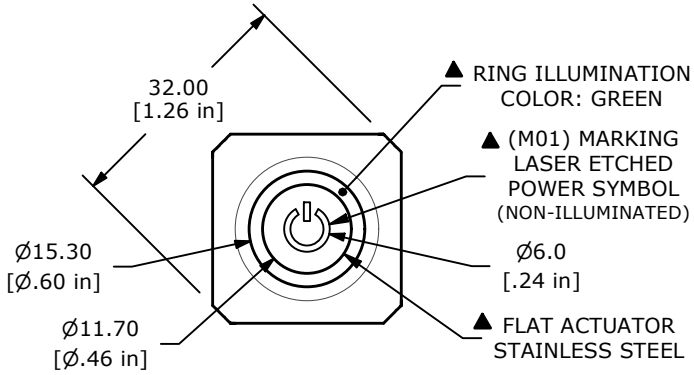



▲ SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5


( ) = MOMENTARY



▲ DPDT
CONTACT CONFIGURATION

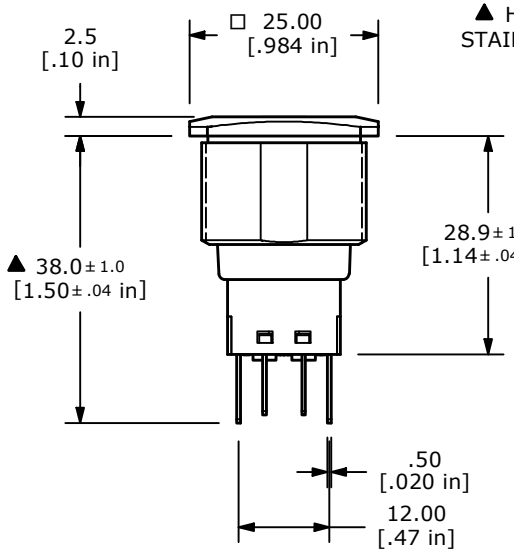

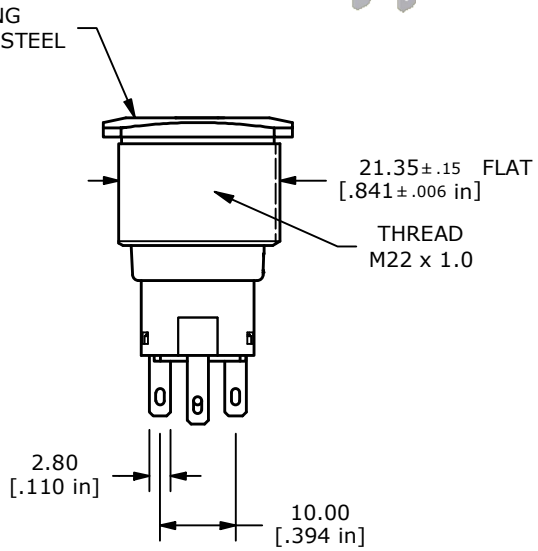

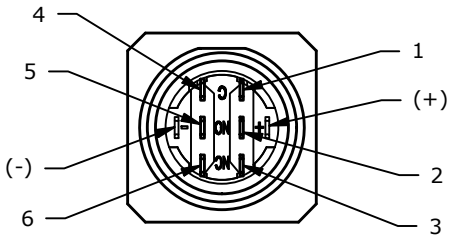

NOTE:
1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -40°C to 85°C
11. TRAVEL: 2.8mm
12. ▲ DENOTES CRITICAL PARAMETER.
13. INGRESS PROTECTION: IP65
▲14. HARDWARE SUPPLIED: O-RING AND HEXNUT
▲15. LAMP VOLTAGE: 2.8V

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-103537	PRINT UPDATE	07/21/25	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000003323

TITLE PVS7F2HSS-331-M01

SCALE	DATE	DR	DWG	REV
1:1	4/11/2019	MW	52-PVS7F2HSS331M01	B