


SHEET 1 OF 1




RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.20-19.30
1.25-2.00	19.30-19.40
2.00-3.00	19.50-19.60

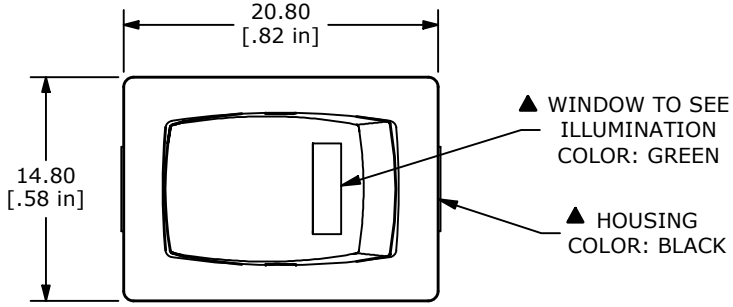






SWITCH FUNCTION	
POS. 1	POS. 3
OFF	ON
OPEN	1a - 1




CIRCUIT: SPST

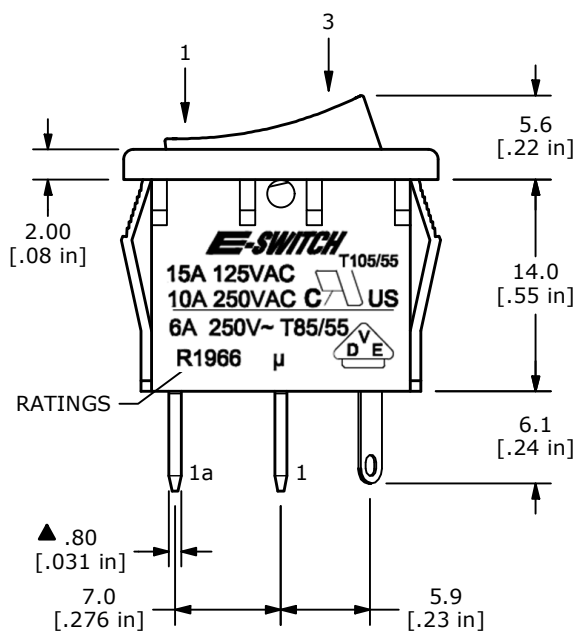

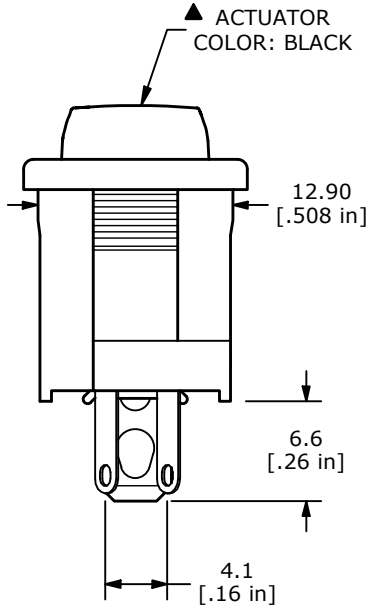

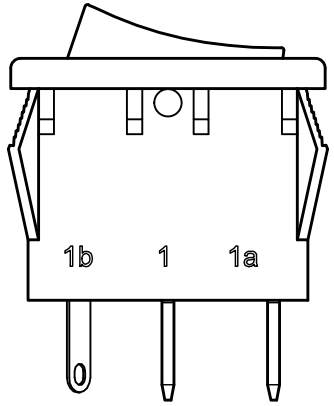

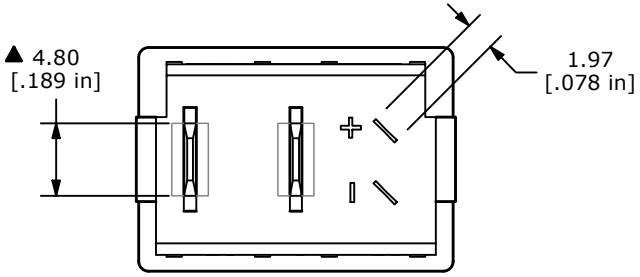

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERM. NUMBERS FOR REF. ONLY
▲ 4. RATING: 15A @125VAC [cURus]
   10A @250VAC [cURus]
   6A @ 250V [VDE]
▲ 5. LAMP COLOR: GREEN LED
6. MATERIAL: CONTACT: COIN SILVER, SILVER PLATED
   TERMINAL: COPPER ALLOY W/SILVER PLATE
7. ELECTRICAL LIFE: 10,000 CYCLES
8. CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
9. DIELECTRIC STRENGTH: >1,500V AC 1 MIN
10. OPERATING TEMP.: -30˚C to 80˚C
11. ▲ DENOTES CRITICAL PARAMETER.

▲ LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.0 TYP.
LUMINOUS INTENSITY	mcd	30 typ.

REV	ECO NO	DESCRIPTION	DATE	BY
D	ECO-103400	UPDATE NOTE 4	05/05/25	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000016567

TITLE R1966ABLKBLKEFGRN

SCALE	DATE	DR	DWG	REV
2:1	9/20/2001	CB	M301101	D