

SHEET OF

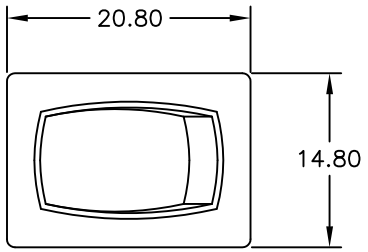





PANEL CUTOUT

PANEL THICKNESS	X
0.75–1.25	19.2
1.25–2.0	19.4
2.0–3.0	19.8

OBSOLETE
November 2017
PCR 23115

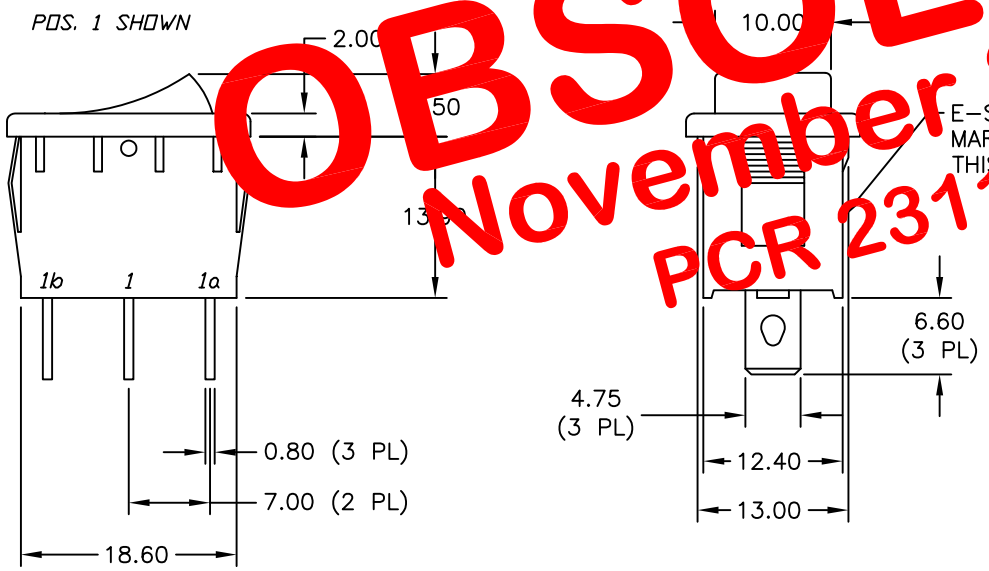



CIRCUIT: SPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
1–1a	OPEN	1–1b

( ) = MOMENTARY

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN mm
2. GENERAL TOLERANCE: 0.0=±0.4
   0.00=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 15A @ 125VAC OR 6A @ 250VAC
5. ELECTRIC LIFE: 10,000 cycles
6. INSULATION RESISTANCE: >1000 mega–ohm
7. DIELECTRIC STRENGTH: >1500 V 1 minute
   >3000 V between poles

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	10715	RELEASED FOR PRODUCTION	6/30/00	GLG

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: R1966 G BLK RED E F

SCALE	DATE	DR	DWG	REV
1.5:1	6/30/00	GLG	M306209	A