



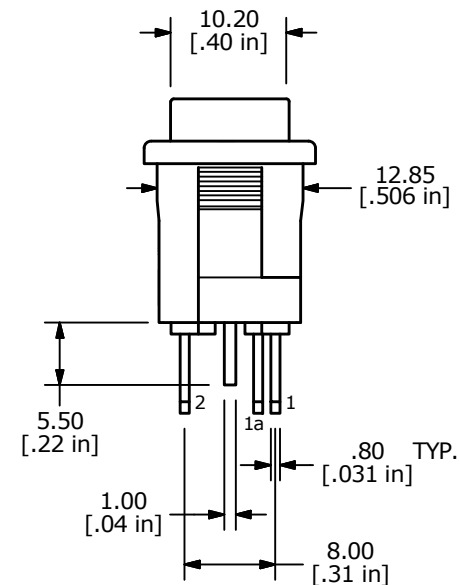


PANEL THICKNESS	X
0.75-1.25	19.15 +/- .05
1.25-2.00	19.35 +/- .05
2.00-3.00	19.5 +/- .10

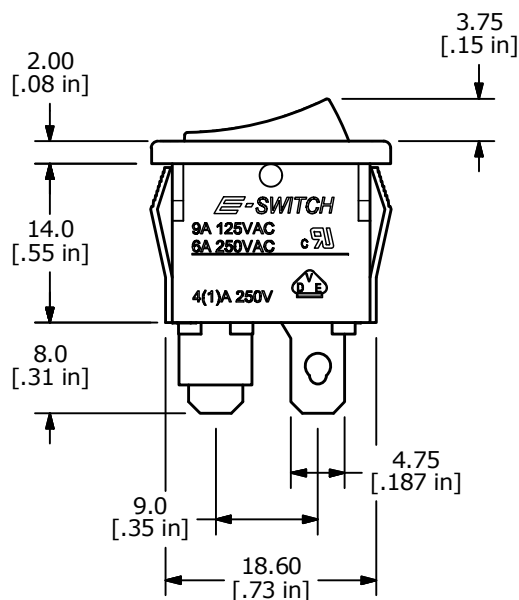

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 6A @250VAC; 9A @125VAC (UL, CSA, VDE)
4(1)A @250VAC
- ▲ 4. LAMP VOLTAGE: 6VDC LED
5. MATERIAL:
CONTACT SURFACE: COIN SILVER, SILVER PLATE
TERMINAL: COPPER ALLOY W/SILVER PLATE.
6. CONTACT RESISTANCE: 20 Milli-OHMS TYP. INITIAL
7. INSULATION RESISTANCE: 1000 MEGAOHMS
8. DIELECTRIC STRENGTH: >1500V RMS min. @SEA LEVEL
9. MECHANICAL LIFE: 30,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES
11. ▲ DENOTES CRITICAL PARAMETER.

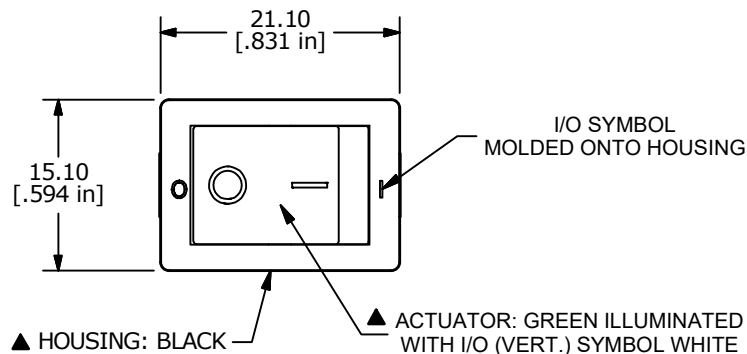

B	24216	Redrawn, Incandescent Bulb to LED	3/9/20	MW
A	18434	RELEASED FOR PRODUCTION	3/23/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE R1973ABLKILFF6

SCALE 3:2

DATE 11/15/2002

DR CJB

DWG M400069

REV B