
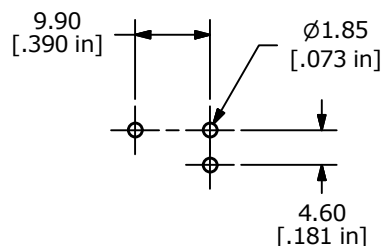


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.5-19.6







PCB MOUNTING

CIRCUIT:
SPST ILLUMINATED

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- RATING: 6A @250VAC; 9A @125VAC (UL)
4(1)A @250VAC (VDE)
- LAMP VOLTAGE: 6 VDC, INCANDESCENT BULB
- MATERIAL: CONTACT SURFACE: COIN SILVER, SILVER PLATE
TERMINAL: COPPER ALLOY W/SILVER PLATE
- CONTACT RESISTANCE: 20 mILLI-OHMS TYP. INITIAL
- INSULATION RESISTANCE: 1000 MEGA-OHMS
- DIELECTRIC STRENGTH: >1500VAC
- MECHANICAL LIFE: 30,000 CYCLES
- ELECTRICAL LIFE: 10,000 CYCLES
- OPERATING TEMP: -30°C TO 55°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2011/65/EU (ROHS) COMPLIANT

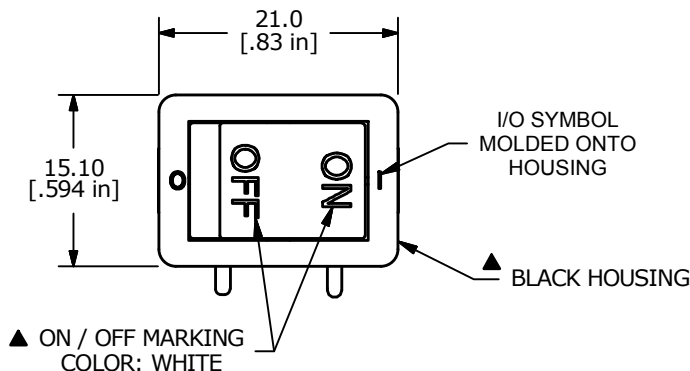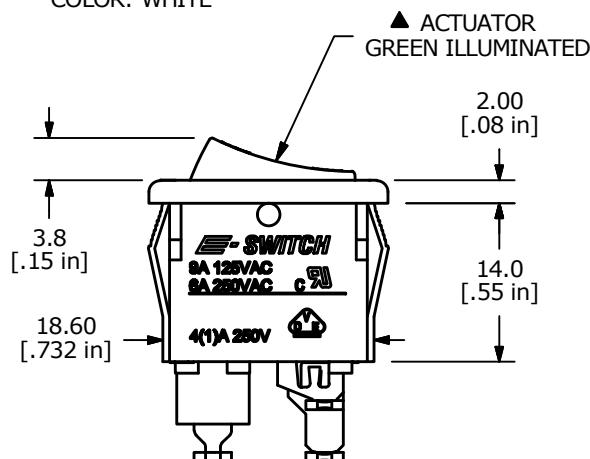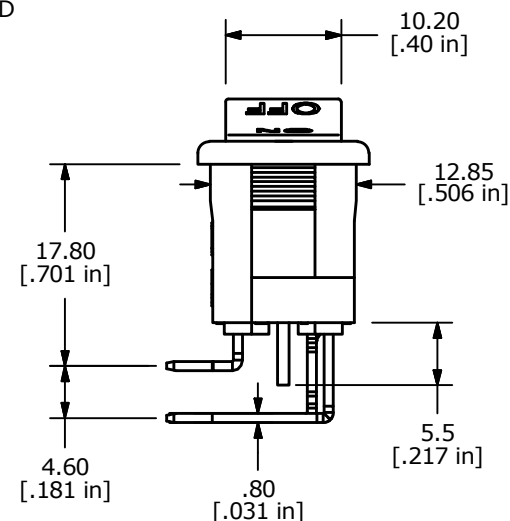

E-SWITCH®

B	22602	Replace PIN 2a with PIN 1a	11/22/16	MW
A	22581	RELEASE FOR PRODUCTION	11/14/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE R1973ABLKGILIR6

SCALE

3:2

DATE

11/14/2016

DR

MW

DWG

M400131

REV

B