

SHEET 1 OF 1




RECOMMENDED PANEL MOUNTING


PANEL THICKNESS	X
0.70-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.4-19.6





CIRCUIT: DPST
ON - OFF

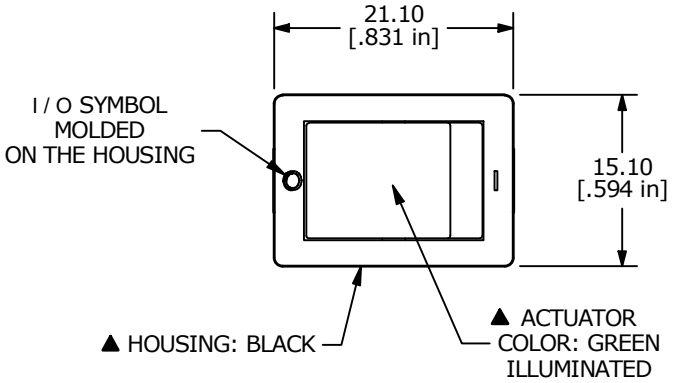



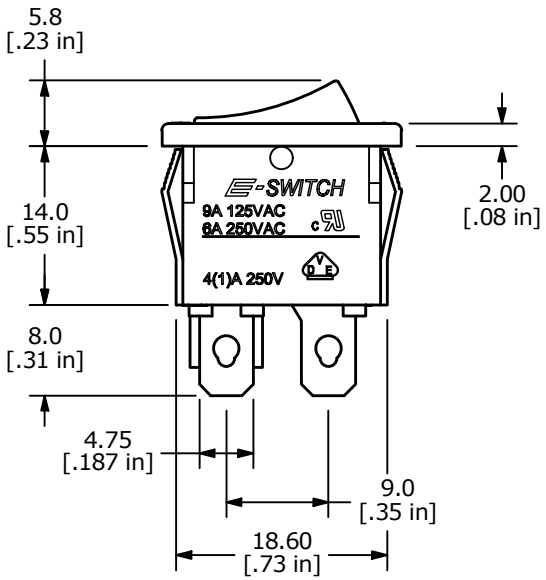

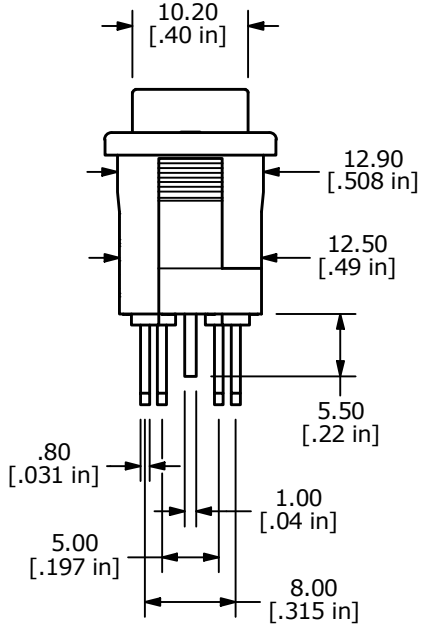



NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. RATING: 6A @250VAC (cURus)
   9A @125VAC (cURus)
   4(1)A @250VAC (VDE)
▲ 4. LAMP VOLTAGE: 24VDC (LED)
5. MATERIAL:
   CONTACT SURFACE: COIN SILVER, SILVER PLATE
   TERMINAL: COPPER ALLOY W/SILVER PLATE.
6. CONTACT RESISTANCE: <20mΩ
7. INSULATION RESISTANCE: 1000MΩ
8. DIELECTRIC STRENGTH: >1500V RMS min. @SEA LEVEL
9. MECHANICAL LIFE: 30,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES
11. ▲ DENOTES CRITICAL PARAMETER.

REV	PCR NO	DESCRIPTION	DATE	BY
A	24538	RELEASED	10/15/20	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE R1973BBLKGILEF4

SCALE	DATE	DR	DWG	REV
3:2	10/15/2020	MW	M400135	A