
SHEET 1 OF 1


▲ NEON BULB

| PARAMETERS | SYMBOL | MAX. | UNITS |
|---|---|---|---|
| LAMP VOLTAGE (AC) | V | 250 | V |
| STARTUP VOLTAGE | $V_S$ | 95 | V |
| CURRENT | I | 0.8 | mA |
| SERIES RESISTANCE (125V) | R | 120 | OMHS |






RECOMMENDED PANEL MOUNTING


| PANEL THICKNESS | X |
|---|---|
| 0.75-1.25 | 19.2-19.3 |
| 1.25-2.00 | 19.3-19.4 |
| 2.00-3.00 | 19.5-19.6 |






CIRCUIT: DPST
(ILLUMINATED)
ON - OFF

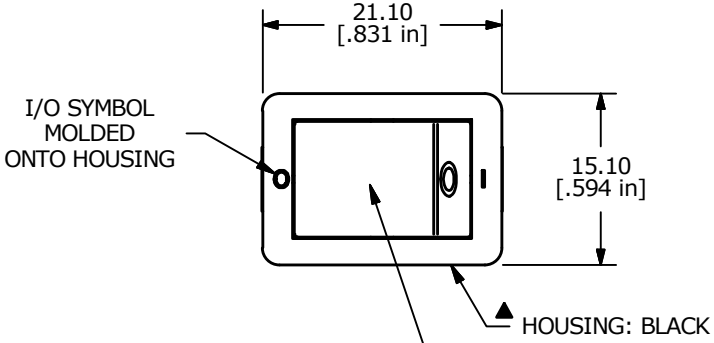

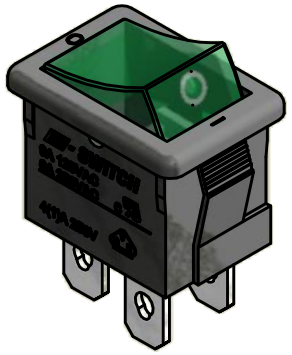

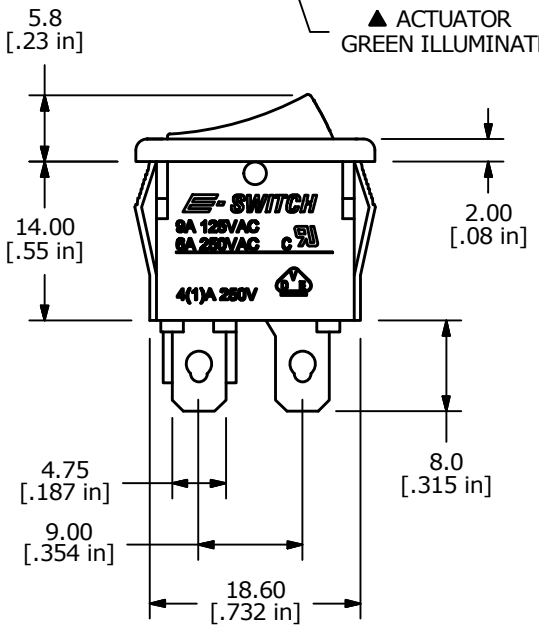
NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. RATING: 6A @250VAC
   9A @125VAC (UL, CSA)
   4(1)A @250VAC (VDE)
▲ 4. LAMP VOLTAGE: 250VAC (NEON BULB)
5. MATERIAL:
   CONTACT SURFACE: COIN SILVER, SILVER PLATE
   TERMINAL: COPPER ALLOY W/SILVER PLATE.
6. CONTACT RESISTANCE: 20 mILLI-OHMS TYP. INITIAL
7. INSULATION RESISTANCE: 1000 MEGA-OHMS
8. DIELECTRIC STRENGTH: >1500V RMS min. @SEA LEVEL
9. MECHANICAL LIFE: 30,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2011/65/EU (ROHS) COMPLIANT
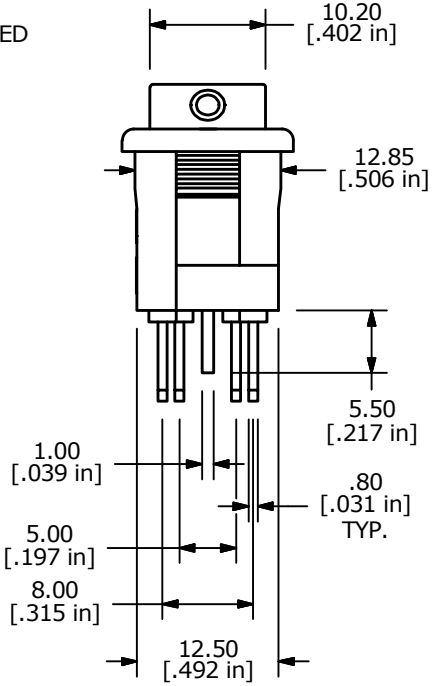
| REV | PCR NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| A | 22531 | RELEASED FOR PRODUCTION | 9/27/16 | MW |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E•SWITCH®

TITLE R1973BBLKGILKF2

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 3:2 | 9/27/2016 | MW | M400130 | A |