

SHEET 1 OF 1


INCANDESCENT

PARAMETERS	SYMBOL	MAX.	UNITS
LAMP VOLTAGE(AC)	V	24	V
STARTUP VOLTAGE	V_S	95	V
CURRENT	I	0.8	mA
SERIES RESISTANCE (125V)	R	120	OMHS

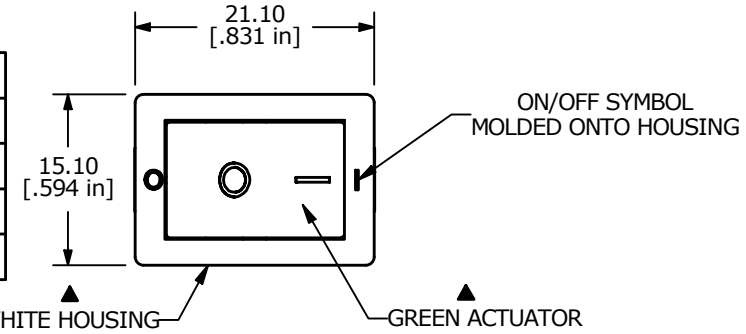

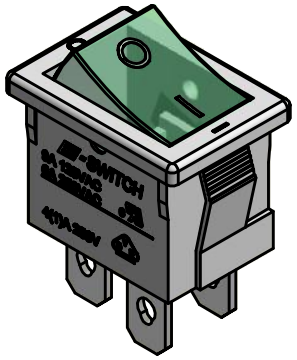


ISOMTRIC




RECOMMENDED PANEL MOUNTING


PANEL THICKNESS	X
0.75-1.25	19.2-19.3
1.25-2.00	19.3-19.4
2.00-3.00	19.5-19.6



CIRCUIT:



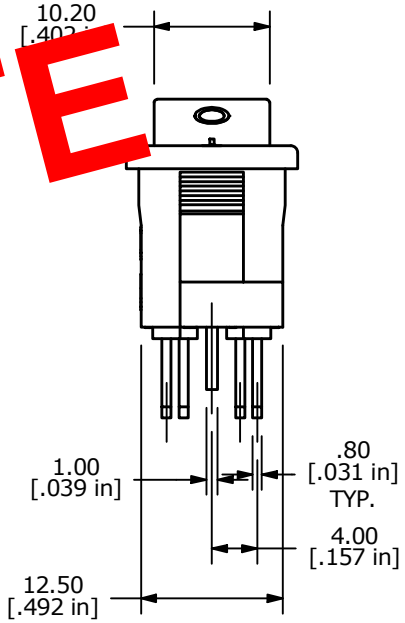



OBSOLETE
August 2020
PCR 24419

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING:
   6A @250VAC;9A @125VAC (UL, CSA, VDE)
   4(1)A @250VAC
4. ▲LAMP VOLTAGE:24VDC (INCANDESCENT BULB)
5. MATERIAL:
   CONTACT SURFACE: COIN SILVER, SILVER PLATE
   TERMINAL: COPPER ALLOY W/SILVER PLATE.
6. CONTACT RESISTANCE: 20mILLIOHMS TYP. INITIAL
7. INSULATION RESISTANCE: 1000MEGAOHMS
8. DIELECTRIC STRENGTH:
   >1500V RMS min. @SEA LEVEL
9. MECHANICAL LIFE: 30,000 CYCLES.
10. ELECTRICAL LIFE: 10,000 CYCLES
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
B	15834	REMOVE NEMKO, SEMKO, FI MARKINGS	3/1/06	PH
A	15446	RELEASED FOR PRODUCTION	10/25/05	PH

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE R1973BWHTGILFF4

SCALE	DATE	DR	DWG	REV
1.5:1	10/25/2005	PH	M400087	B