



RECOMMENDED PANEL MOUNTING


PANEL THICKNESS	X ± 0.05
0.75-1.25	29.65
1.25-2.00	30.15
2.00-3.00	30.50

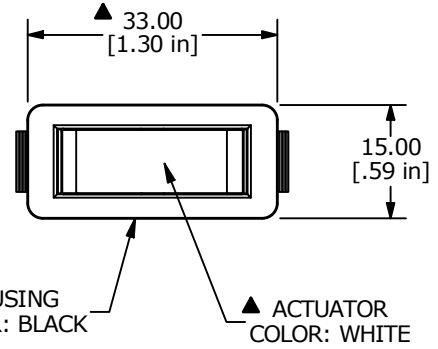





▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
1-1a	OPEN	1-1b

(ON) = MOMENTARY



CIRCUIT: SPDT

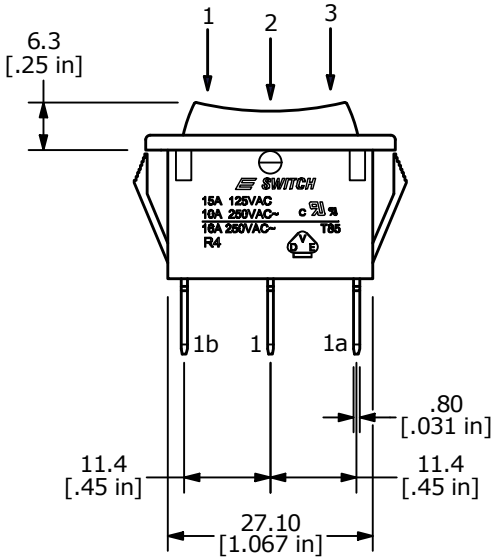

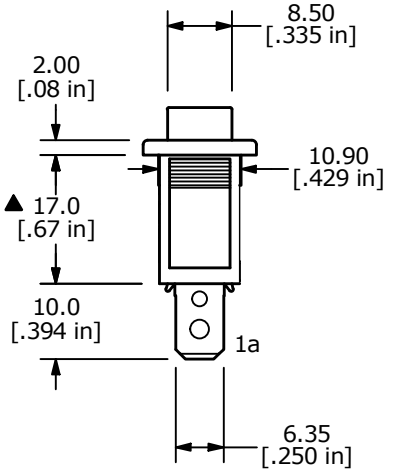

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERM. NUMBERS FOR REF. ONLY
4. RATING: 10A 250VAC, 15A 125VAC UL APPROVED
   10A 250VAC VDE APPROVED
5. ELECTRICAL LIFE: OVER 10,000 CYCLES
6. MECHANICAL LIFE: OVER 30,000 CYCLES
7. CONTACT RESISTANCE: 20 mΩ (INITIAL)
8. DIELECTRIC STRENGTH: >1500V 1 minute
9. INSULATION RESISTANCE: >1,000 MΩ @ 500V DC
10. OPERATING TEMPERATURE: TERMINAL SIDE -20C to 85C
    ROCKER SIDE -20C to 55C
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
F	ECO-101221	update print	09/08/22	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000016410

TITLE R4GBLKWHTEF0

SCALE	DATE	DR	DWG	REV
1:1	3/29/2006	BMA	M040216	F