
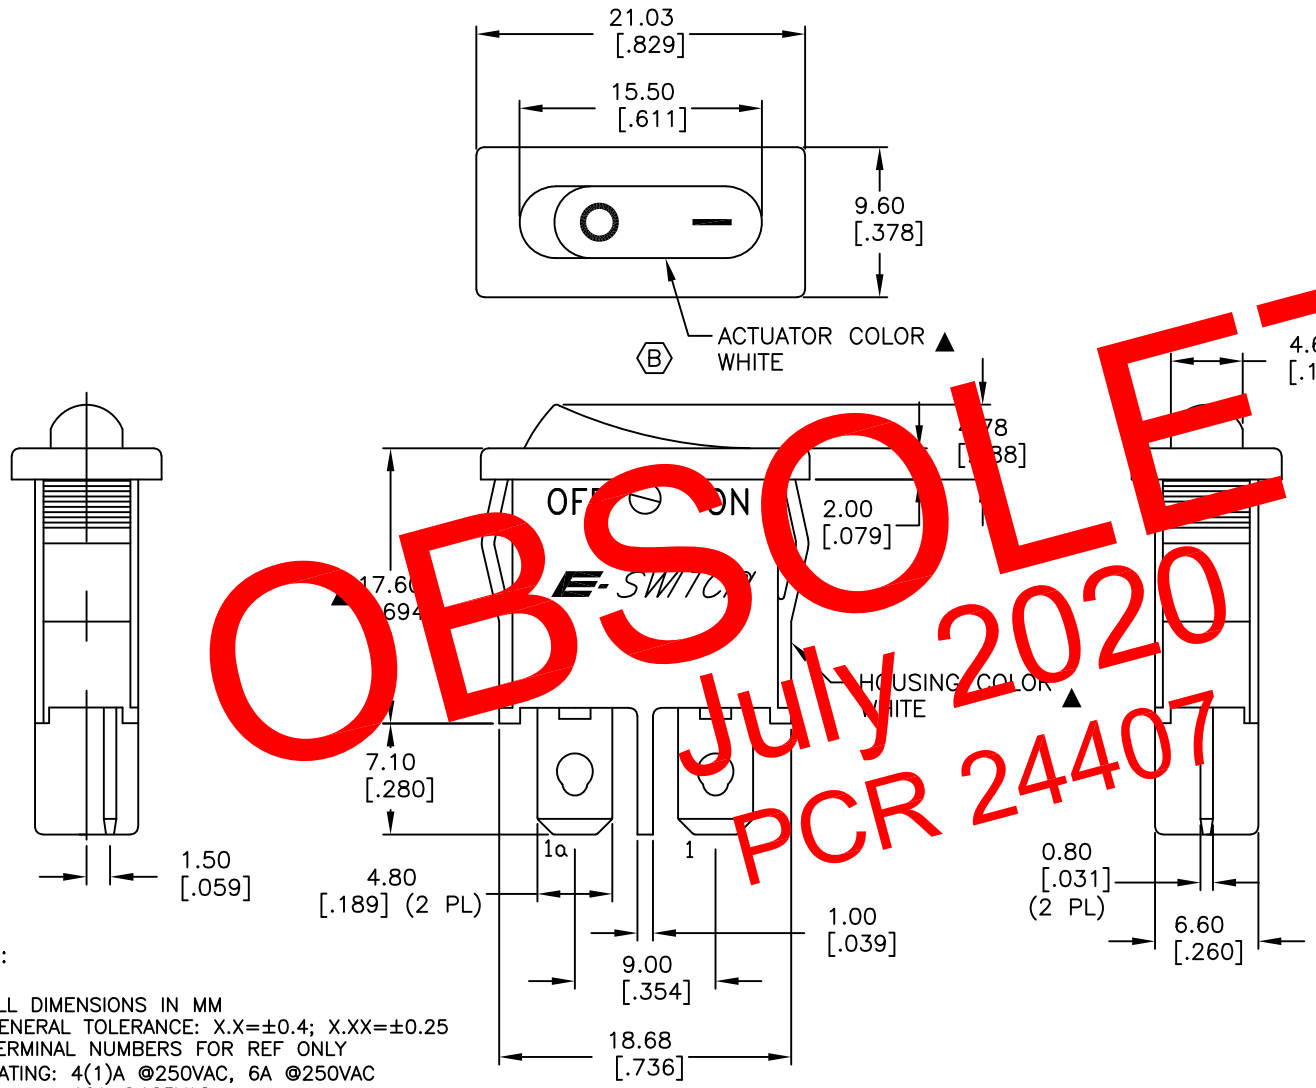


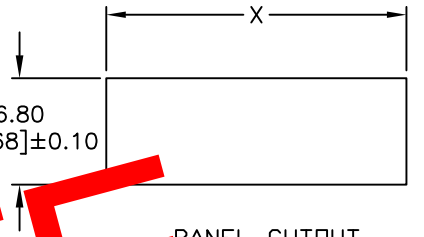


PANEL CUTOUT

PANEL THICKNESS	X
1.25–2.0	19.40
2.00–3.00	19.60

SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
1–1a	OPEN

▲

CONTACT CONFIGURATION



CIRCUIT: SPST

OBSOLETE
July 2020
PCR 24407

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4; X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 4(1)A @250VAC, 6A @250VAC
   10A @125VAC
5. MATERIALS: TERMINALS: COPPER ALLOY W/SILVER PLATING
   CONTACTS: COIN SILVER
6. MECHANICAL LIFE: >50,000 CYCLES
7. ELECTRICAL LIFE: >10,000 CYCLES
8. CONTACT RESISTANCE: < 20 MEGA-OHMS (INITIAL)
9. INSULATION RESISTANCE: > 1000 MEGA-OHMS @ 500VDC
10. DIELECTRIC STRENGTH: >1500VAC 1 MINUTE (INITIAL)
    >3000V BETWEEN POLES
11. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
B	14372	WORDING OF COLOR NOTE	10/4/04	AR
A	14316	RELEASED FOR PRODUCTION	9/15/04	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: R6AWHTWHTFF

SCALE	DATE	DR	DWG	REV
2:1	9/15/04	AR	M060315	B