
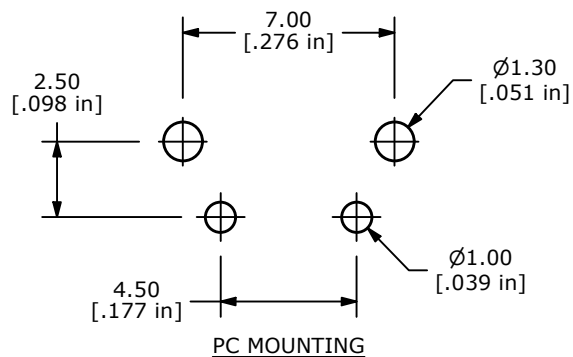



NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50mA @ 50VDC
- ▲ 5. OPERATING FORCE: 250±50 gf
6. TRAVEL: 0.25+0.20/-0.10 mm
7. CONTACT RESISTANCE: 100 MILLI-OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER.
11. OPERATING TEMP: -40°C TO 85°C

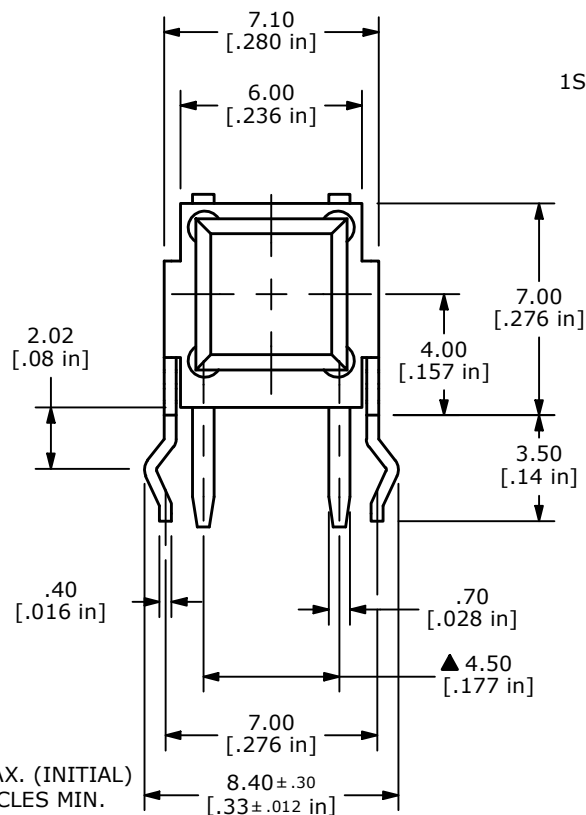

▲ BLACK CAP:
1SBLK (Q800310)

▲ SWITCH
TL1105JAF160R
(P010048)

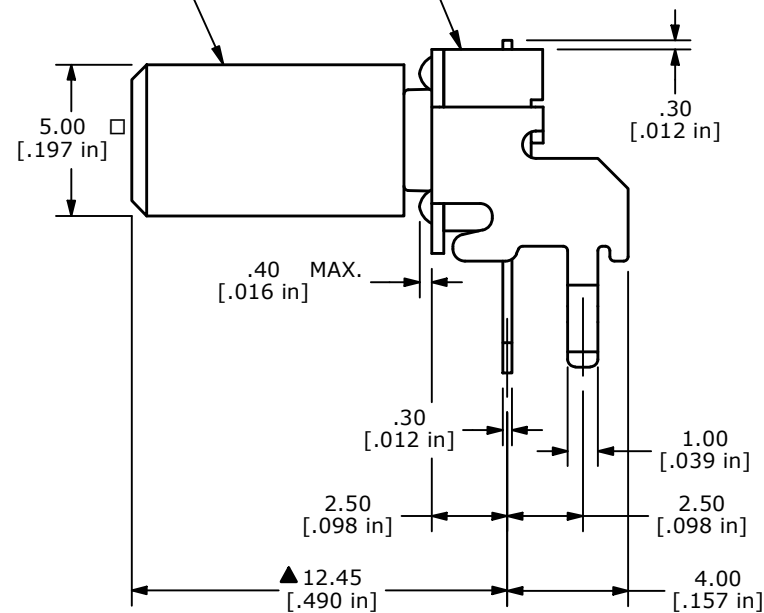

E-SWITCH®

TITLE TL1105JAF250Q1SBLK

SCALE
4:1DATE
9/7/2007DR
BFDWG
XP0177AREV
C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

C	24553	REMOVE STEP IN HOUSING, CHANGE TEMP	10/30/20	JM
B	17648	CHANGED CAP OPTIONS	9/07/07	BF
A	11254	RELEASED FOR PRODUCTION	2/16/01	CJB
REV	PCR NO	DESCRIPTION	DATE	BY