

Approvals



Life expectancy




L-10 LIFE AT 40°C:
80 000 hours

Brushless DC Motor

Electrical protection: impedance protected
Housing material: plastic UL 94 VO
Impeller material: plastic UL 94 VO
Weight: 88 g
Bearing system: ball bearings

Available with:

- Variable speed
- Speed sensor
- Alarm
- IP54 / IP55

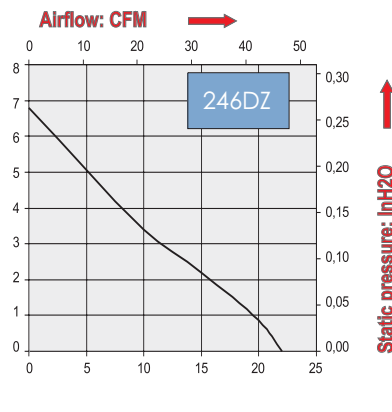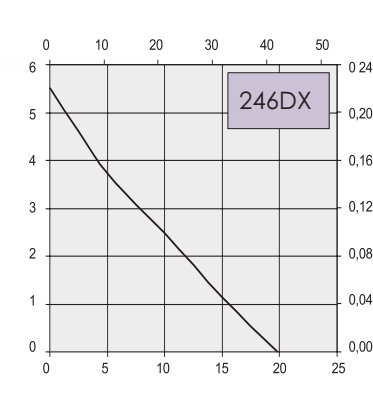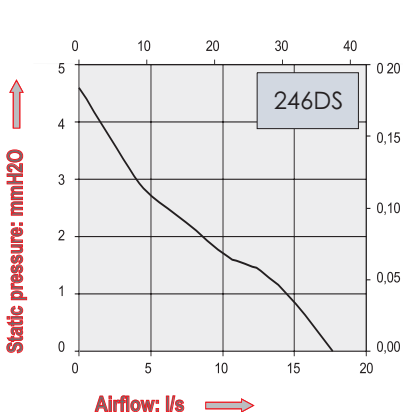

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Input Power	Voltage range	Connection type		Operating temperature	
	V	l/s	dB(A)	RPM	W	V	Leads	Terminals	Min.°C	Max.°C
246DS1LP11000	12	17,7	34	3250	2,4	(7-13,8)	X		-10	70
246DS2LP11000	24	17,7	34	3250	2,2	(14-27,6)	X		-10	70
246DX1LP11000	12	19,8	39	3600	3,1	(7-13,8)	X		-10	70
246DX2LP11000	24	19,8	39	3600	3,4	(14-27,6)	X		-10	70
246DZ1LP11000	12	22,0	40	4000	4,1	(7-13,8)	X		-10	70
246DZ2LP11000	24	22,0	40	4000	3,8	(14-27,6)	X		-10	70

Accessories:
Refer to Accessories leaflet