
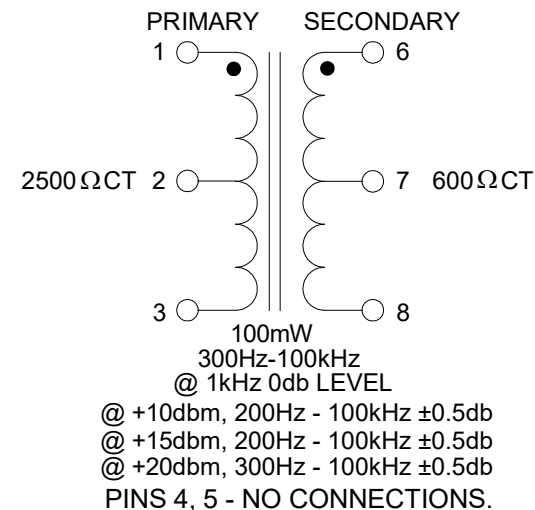


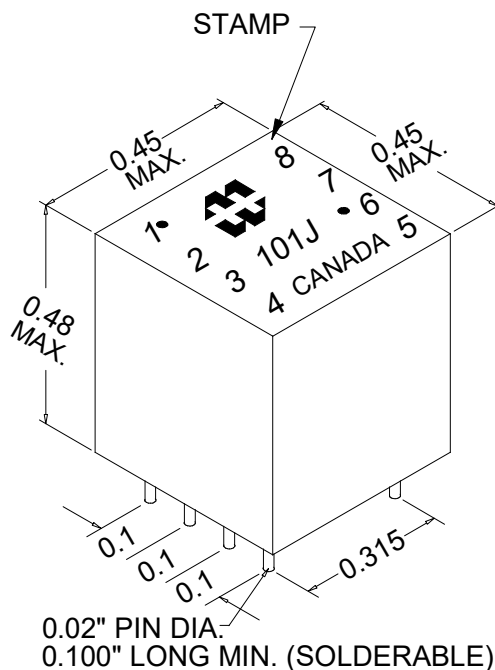

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 3V, 500Hz, PIN 1 - PIN 3	1.5mA Max.
Sec. N.L.V	@ 3V, 500Hz, PIN 1 - PIN 3	
	PIN 2 - PIN 3 =	1.500V ±2%
	PIN 6 - PIN 7 = PIN 7 - PIN 8 =	0.735V ±2%
	PIN 6 - PIN 8 =	1.469V ±2%
DCR	@ 20°C, PIN 1 - PIN 3 =	150.0Ω ±20%
	@ 20°C, PIN 6 - PIN 8 =	54.00Ω ±20%
HIPOT	PRIMARY - SECONDARY	100V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 11/25/24	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: AUDIO	DWG. NO.
			DATE: 11/25/24	APP'D. BY:	TRANSFORMER	101J
				DIMENSIONS: IN(X) MM()		