
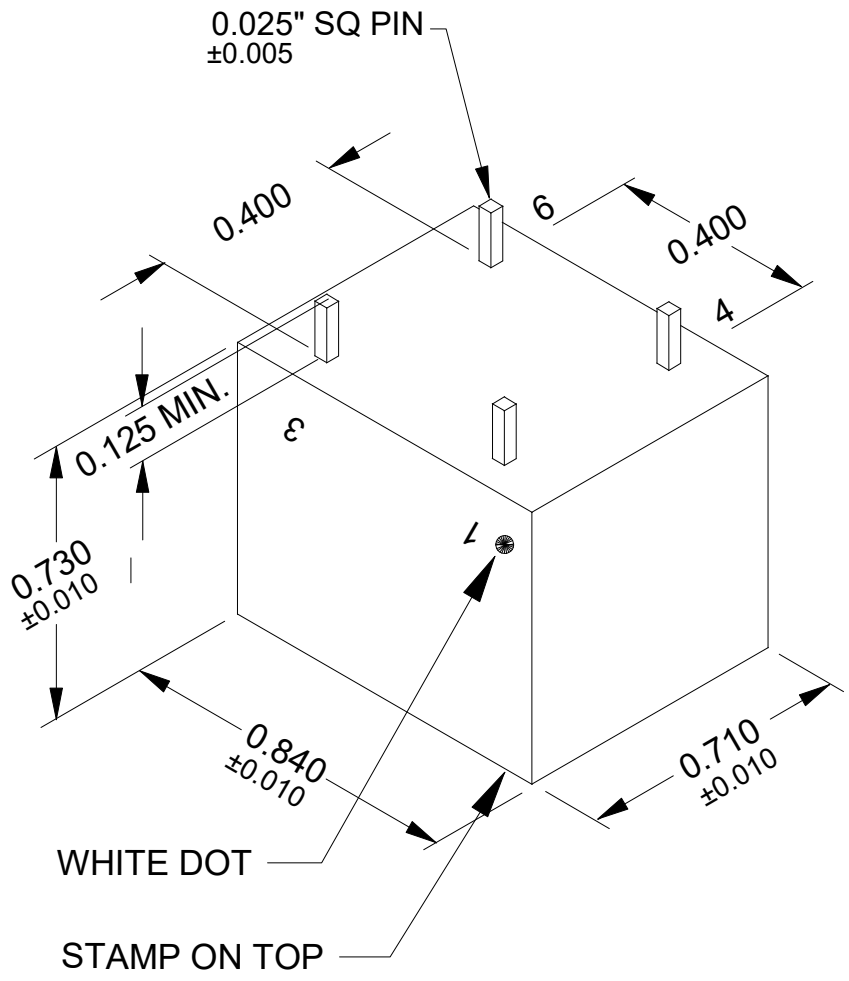


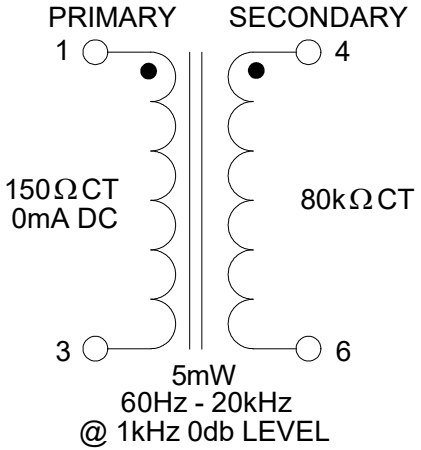

DIMENSIONS TOLERANCE, WHEN NOT STATED: ±0.030

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 0.9V, 60Hz, PIN 1 - PIN 3	4.8mA Max.
Sec. N.L.V	@ 0.9V, 60Hz, PIN 1 - PIN 3	
	PIN 4 - PIN 6 =	20.88V ±2%
DCR	@ 20°C, PIN 1 - PIN 3 =	6.600Ω ±15%
	@ 20°C, PIN 4 - PIN 6 =	3760 Ω ±15%
HIPOT	PRIMARY - SECONDARY	250V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED. C.I.	12/02/24

HAMMOND MANUFACTURING™
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: AUDIO TRANSFORMER	DWG. NO. 104B
DATE: 12/02/24	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		