
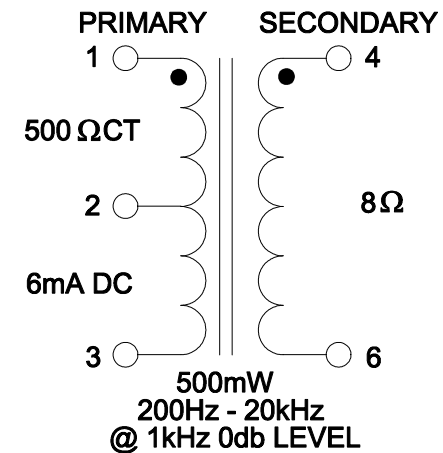


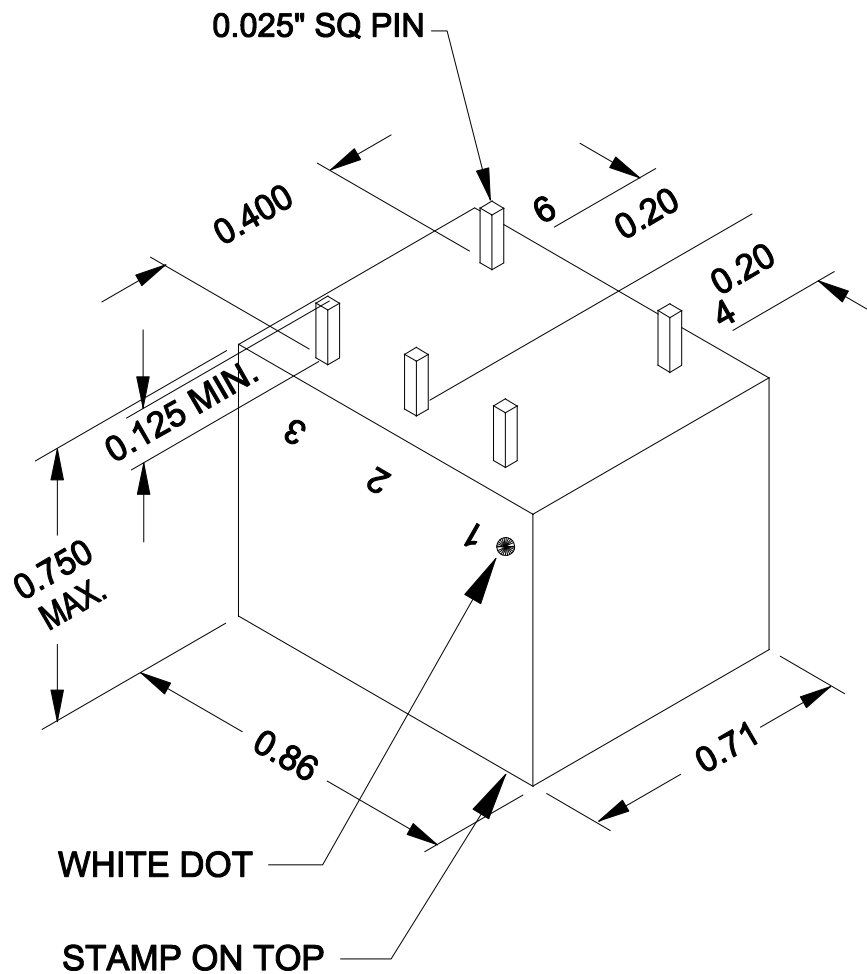

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 16V, 170Hz, PIN 1 - PIN 3	30mA Max.
Sec. N.L.V	@ 16V, 170Hz, PIN 1 - PIN 3	
	PIN 1 - PIN 2 = PIN 2 - PIN 3 =	8.000V $\pm 2\%$
	PIN 4 - PIN 6 =	2.034V $\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 3 =	25.50 Ω $\pm 15\%$
	@ 20°C, PIN 4 - PIN 6 =	0.900 Ω $\pm 15\%$
HIPOT	PRIMARY - SECONDARY	250V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED. C.I.	09/28/17	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: AUDIO	DWG. NO.
			DATE: 09/28/17	APP'D. BY:	TRANSFORMER	104R
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540