
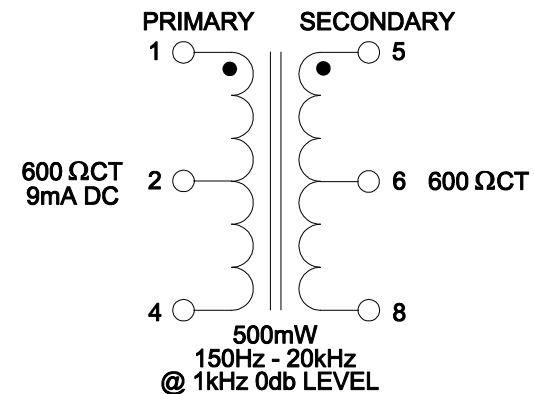


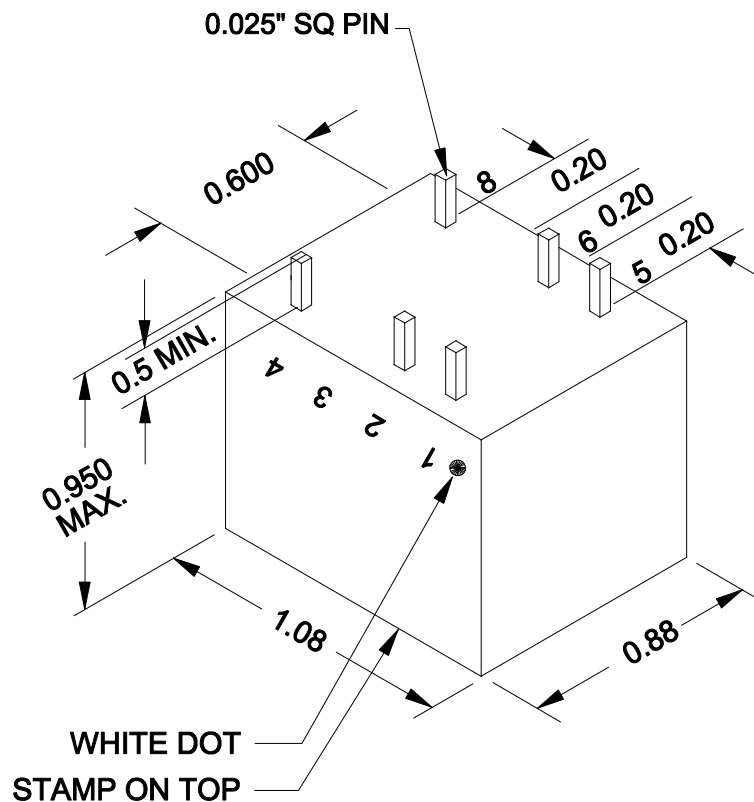

| ELECTRICAL DATA: |                                 |                     |
|------------------|---------------------------------|---------------------|
| TESTS            | CONDITIONS                      | ACCEPTANCE CRITERIA |
| Iex              | @ 9.5V, 400Hz, PIN 1 - PIN 4    | 8.3mA Max.          |
| Sec. N.L.V       | @ 9.5V, 400Hz, PIN 1 - PIN 4    |                     |
|                  | PIN 1 - PIN 2 = PIN 2 - PIN 4 = | 4.750V ±2%          |
|                  | PIN 5 - PIN 6 = PIN 6 - PIN 8 = | 4.750V ±2%          |
|                  | PIN 5 - PIN 8 =                 | 9.500V ±2%          |
| DCR              | @ 20°C, PIN 1 - PIN 4 =         | 64.73 Ω ±15%        |
|                  | @ 20°C, PIN 5 - PIN 8 =         | 86.20 Ω ±15%        |
| HIPOT            | PRIMARY - SECONDARY             | 500V, 60Hz, 1 SEC   |

| REV.# | REVISION       | DATE     | HAMMOND ELECTRONIC DIVISION                 |            |              |          |
|-------|----------------|----------|---------------------------------------------|------------|--------------|----------|
| 0     | RELEASED. C.I. | 08/29/23 | 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5 |            |              |          |
|       |                |          | PH # (519) 886-6181 FAX # (519) 886-9540    |            |              |          |
|       |                |          | DWG. BY: C. ILIE                            | CHK'D BY:  | TITLE: AUDIO | DWG. NO. |
|       |                |          | DATE: 08/29/23                              | APP'D. BY: | TRANSFORMER  | 106EE    |
|       |                |          | DIMENSIONS: IN(X) MM( )                     |            |              |          |