
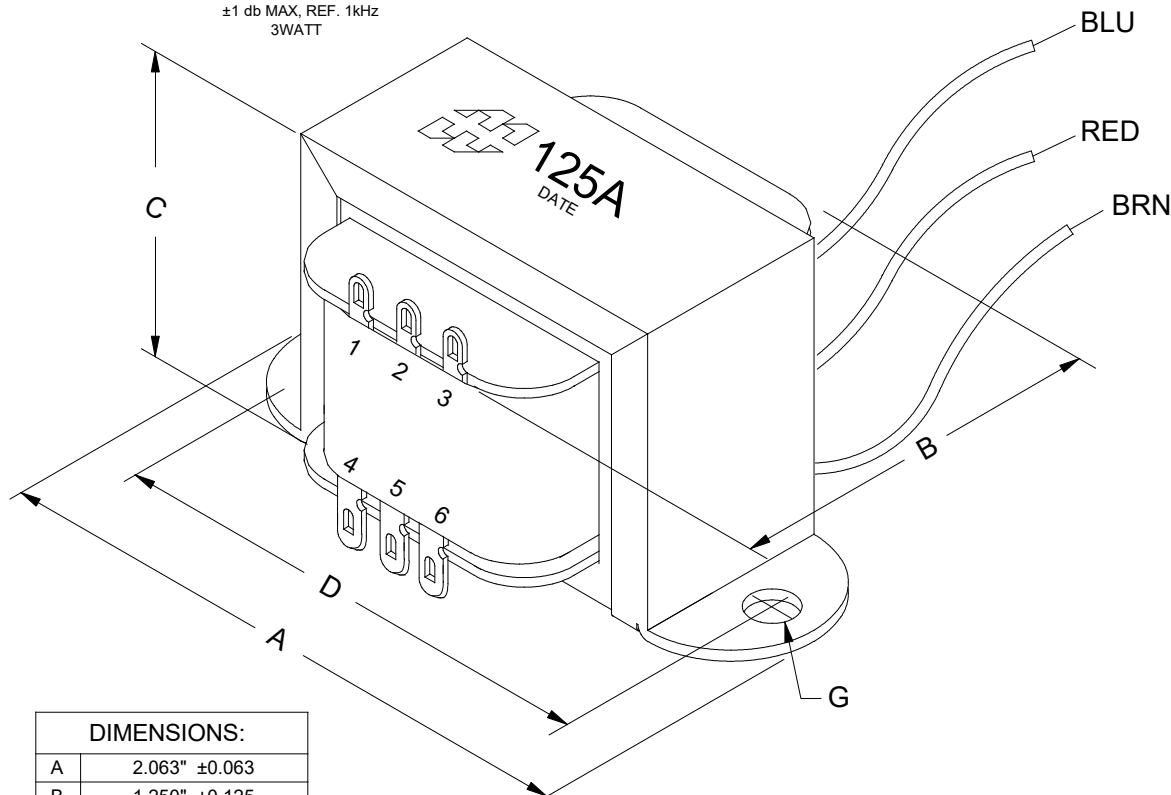


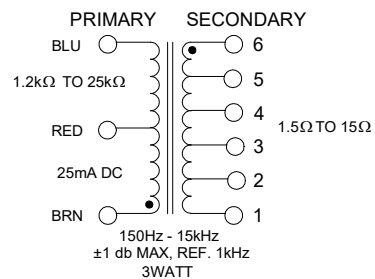

DIMENSIONS:	
A	2.063" ±0.063
B	1.250" ±0.125
C	1.188" ±0.063
D	1.750" ±0.063
G	0.187" ±0.015

CONNECT SPEAKER TO SECONDARY LUGS	VOICE COIL IMPEDANCE (OHMS)							
	1.5 Ω	2 Ω	3.2 Ω	4 Ω	6 Ω	8 Ω	12 Ω	15 Ω
	RESULTING TOTAL PRIMARY IMPEDANCE (BLUE WIRE TO BROWN WIRE)							
1 - 2	27000							
2 - 3	18000	24000						
3 - 4	16500	22000						
4 - 5	10000	13500	21600	27000				
5 - 6	8500	11000	18000	22000				
1 - 3	5400	7200	11500	15000	21600			
2 - 4	4200	5600	9000	11200	16800	22500		
3 - 5	3300	4400	7000	8800	13200	17600	26400	
4 - 6	2400	3200	5100	6400	9600	12800	19200	24000
1 - 4	2150	2900	4600	5800	8700	11600	17400	21500
2 - 5	1550	2050	3300	4100	6150	8200	12300	15500
3 - 6	1300	1700	2700	3400	5100	6800	10200	12800
1 - 5		1400	2200	2800	4200	5600	8400	10200
2 - 6			1700	2100	3150	4200	6300	8000
1 - 6			1200	1500	2300	3000	4500	5600

125 SERIES
CONNECTION CHART

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 130V, 400Hz, BLU - BRN	4mA Max.
Sec. N.L.V	@ 130V, 400Hz, BLU - BRN	
	BLU - RED =	65.00V ±2%
	PIN 1 - PIN 2 =	0.967V ±2%
	PIN 1 - PIN 3 =	2.174V ±2%
	PIN 1 - PIN 4 =	3.431V ±2%
	PIN 1 - PIN 5 =	5.026V ±2%
	PIN 1 - PIN 6 =	6.766V ±2%
DCR	@ 20°C, BLU - BRN =	295.0 Ω ±20%
	@ 20°C, PIN 1 - PIN 6 =	1.200 Ω ±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING ELECTRONIC DIVISION			
0	RELEASED.	C.I. 06/06/18	52 RANKIN PLACE,			
1	ADDED POLARITY DOTS TO SCHEMATIC.	C.I. 08/08/25	WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: TUBE DRIVER	DWG. NO.
			DATE: 06/06/18	APP'D. BY:	INTERSTAGE TRANSFORMER	125A
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540