
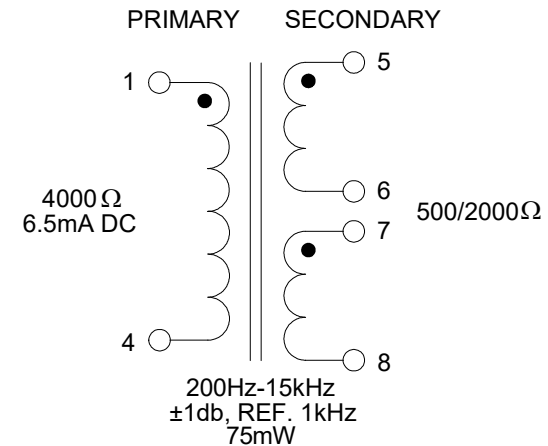


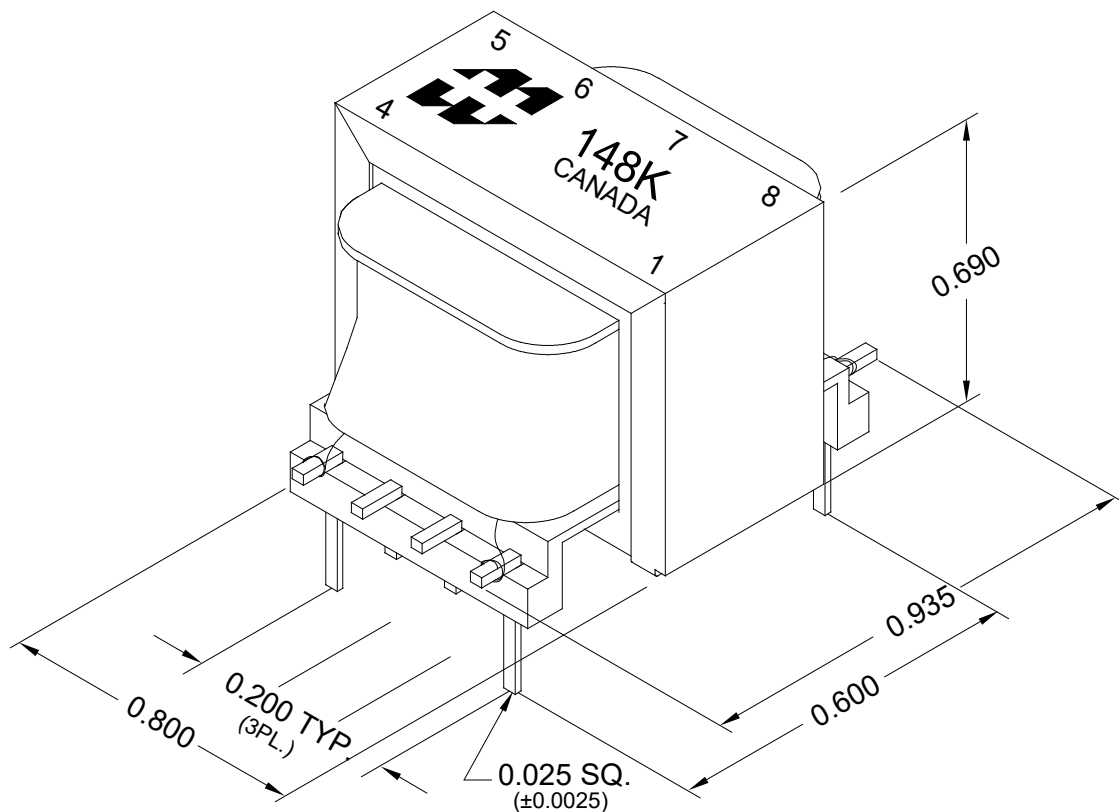

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 13V, 400Hz, PIN 1 - PIN 4	1.2mA	Max.
Sec. N.L.V	@ 13V, 400Hz, PIN 1 - PIN 4		
	PIN 5 - PIN 6 =	4.600V	±2%
	PIN 7 - PIN 8 =	4.600V	±2%
DCR	@ 20°C, PIN 1 - PIN 4 =	495.5 Ω	±15%
	@ 20°C, PIN 5 - PIN 6 =	101.6 Ω	±15%
	@ 20°C, PIN 7 - PIN 8 =	101.6 Ω	±15%
HIPOT	PRIMARY - SECONDARY	250V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING ELECTRONIC DIVISION			
0	RELEASED. C.I.	12/17/24	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE:	DWG. NO.
			DATE: 12/17/24	APP'D. BY:	P.C. BOARD MOUNT	148K
				DIMENSIONS: IN(X) MM()	AUDIO TRANSFORMER	