




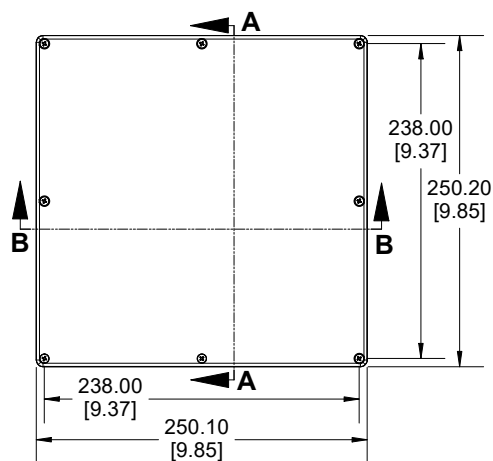


TOP VIEW

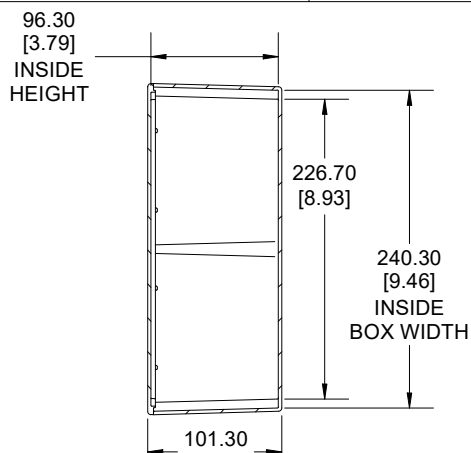



**SECTION A-A
END VIEW**

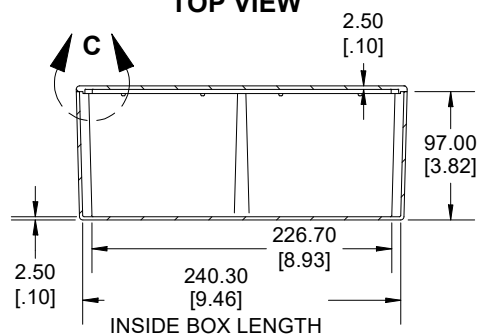

**SECTION B-B
SIDE VIEW**





**DETAIL C
SCALE 1 / 2**

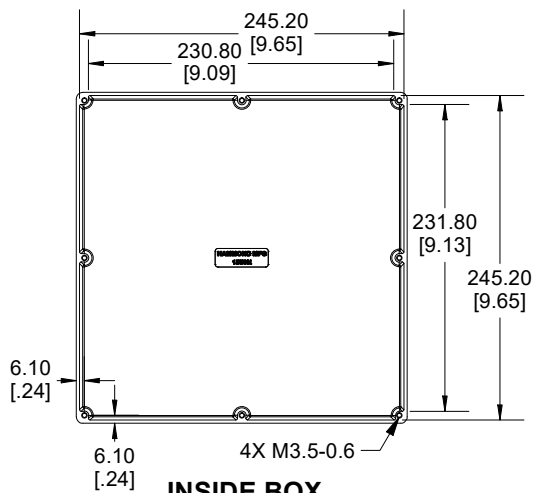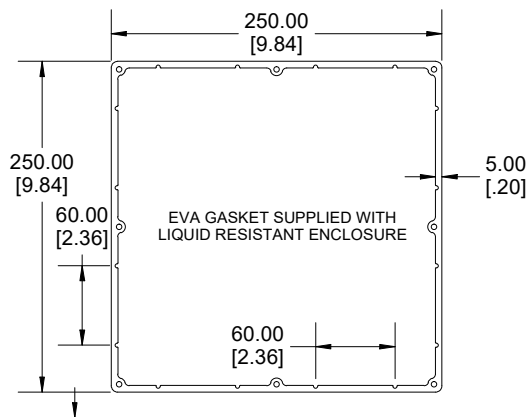


INSIDE BOX

**DETAIL D
SCALE 3/4**

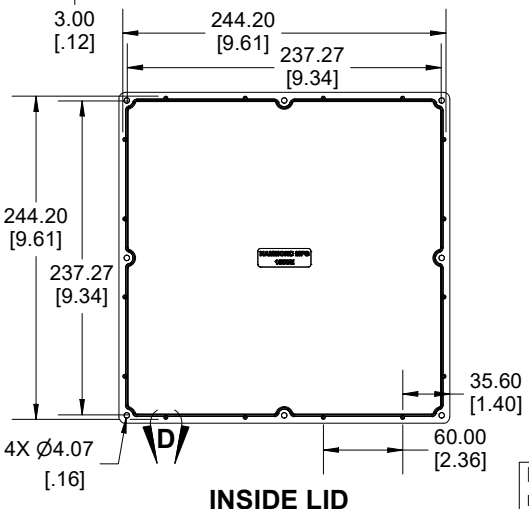

INSIDE LID

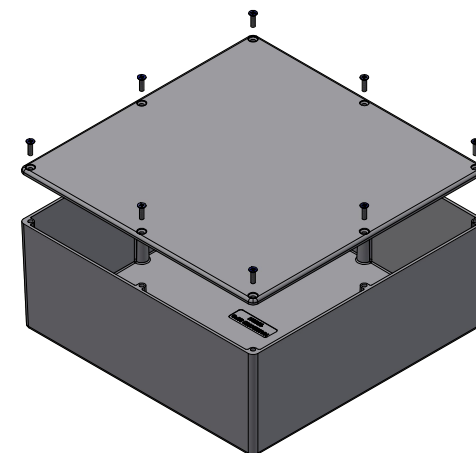

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammfg.com) for quotes
Solid models of this enclosure available in .stp or .x_t
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

NOTE

Purchased assembly includes box, lid and 8 cover screws.
Box and lid are made from Diecast Aluminum Alloy.
EVA Gasket supplied with liquid resistant enclosure.

Recommended Cover screw torque: 78-85 ozf.in / 55-60 cN.m

Recommended Cover screw torque with gasket: 50-56 ozf.in / 35-40 cN.m

PART NUMBERS

1550P Enclosure	
Natural Finish Enclosure	1550N
Black Textured Enclosure	1550NBK
1550P Liquid Resistant Enclosure (Silicone Gasket)	
Natural Finish Enclosure	1550WVN
Black Textured Enclosure	1550WNBK
ACCESSORIES	
Plated Cover Screws (Pkg 100) [M3.5-0.6 x 12mm]	1550MS100
Black Cover Screws (Pkg 100) [M3.5-0.6 x 12mm]	1550MS100BK
Stainless Steel Cover Screws (Pkg 100) [M3.5 x 12mm, With O-Ring]	1550WMS100
Black Stainless Steel Cover Screws (Pkg 100) [M3.5 x 12mm, With O-Ring]	1550WMS100BK
EVA Pre-formed Gasket Black	1550NEGASKET
Silicone Pre-formed Gasket Black	1550NSGASKET



HAMMOND
1550N
www.hammondmfg.com

Dimensions:
mm
[inches]