



DIMENSIONS:	
A	3.250" ± 0.063
B	1.885" ± 0.125
C	1.995" ± 0.063
D	2.813" ± 0.063
G	0.187" ± 0.015

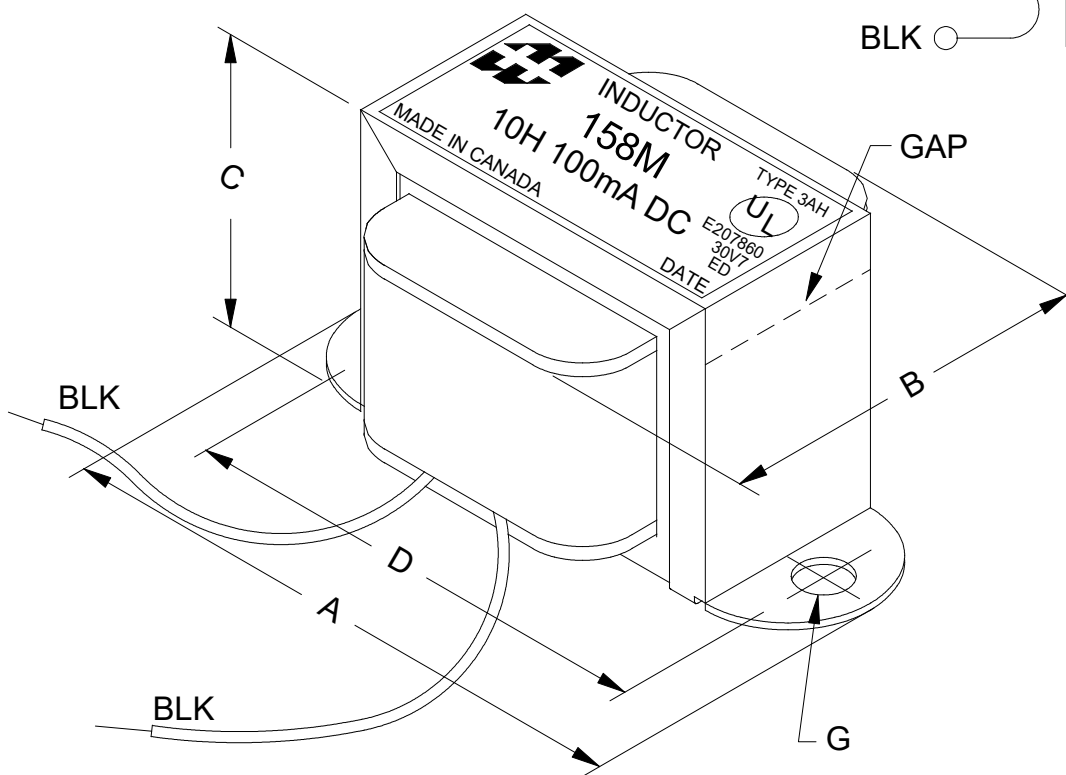

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.
OPERATING TEMPERATURE: -40°C TO $+85^{\circ}\text{C}$
MANUFACTURED USING
CLASS B (130°C) MATERIALS.
RoHS COMPLIANT

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 30V, 60Hz, 100mA DC, BLK - BLK	10H $\pm 15\%$
DCR	@ 20°C , BLK - BLK =	188.9 Ω $\pm 15\%$
HIPOT	PRMARY - SECONDARY	2500V, 60Hz, 1 SEC

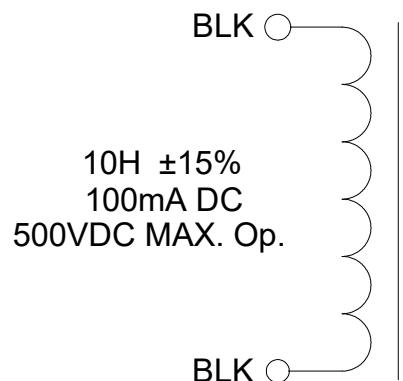

ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION		DWG. BY
0	10/01/12	RELEASED.	C.I.	C. ILIE
1	03/21/25	CORRECTED DCR.	C.I.	DATE
				10/01/12
				DIM IN(X)MM()

158M