
DIMENSIONS:	
A	3.250" ±0.063
B	1.885" ±0.125
C	1.995" ±0.063
D	2.813" ±0.063
E	1.076" ±0.063
F	2.326" ±0.063
G	0.187" ±0.015

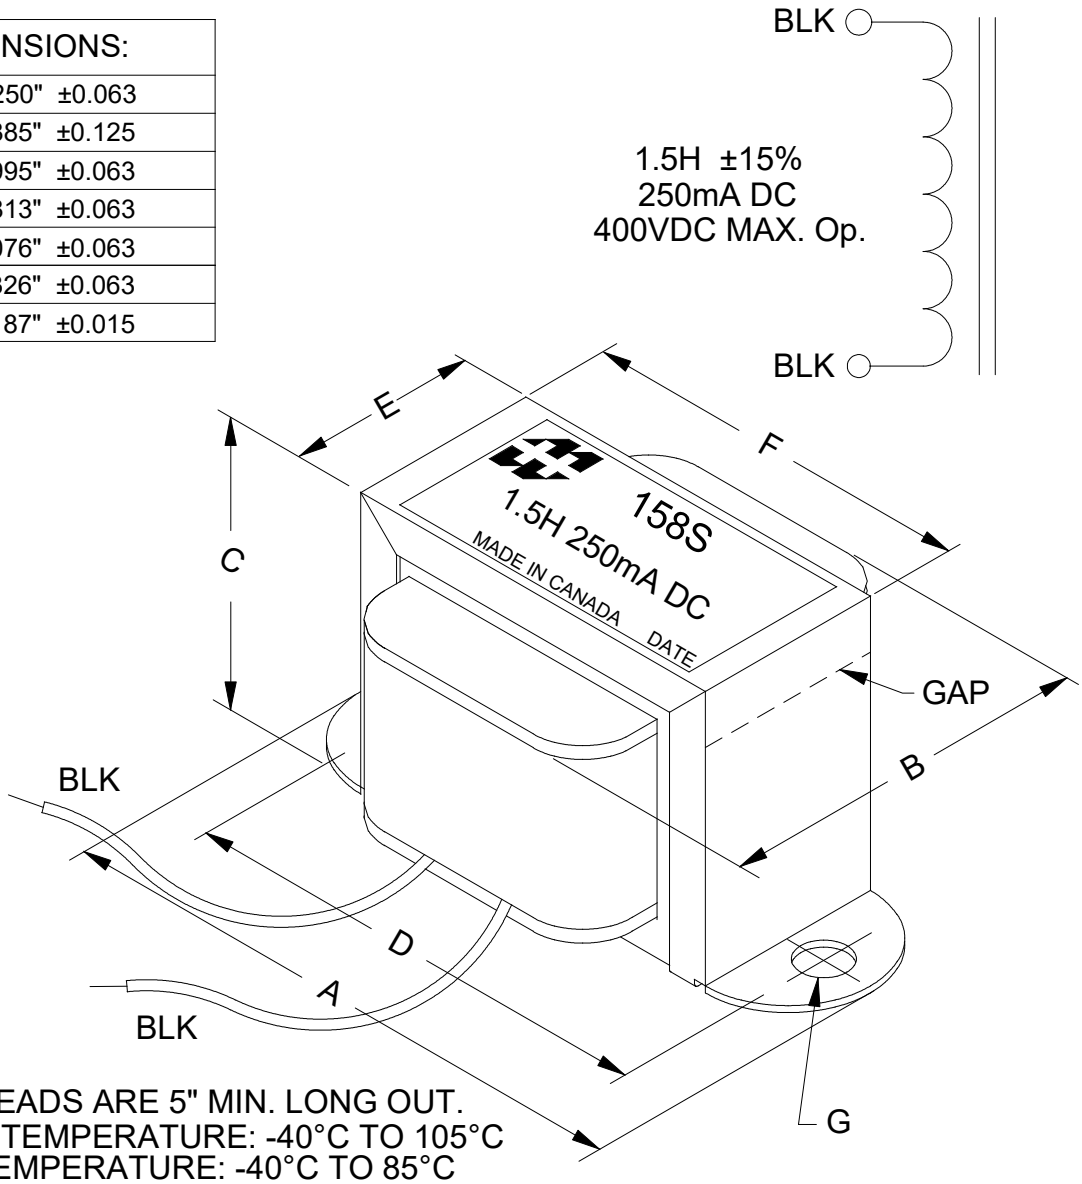

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.
OPERATING TEMPERATURE: -40°C TO 105°C
STORAGE TEMPERATURE: -40°C TO 85°C
MANUFACTURED USING CLASS B (130°C) MATERIALS.
RoHS & REACH COMPLIANT

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 30V, 60Hz, 250mA DC, BLK - BLK	1.5H ±15%
DCR	@ 20°C, BLK - BLK =	59.68 Ω ±15%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

HAMMOND MANUFACTURING T.M.
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE: CHOKE

NO	DATE	REVISION	
0	11/06/24	RELEASED.	C.I.

DWG. BY: C. ILIE
DATE: 11/06/24
DIM IN(X)MM( )

158S