


DIMENSIONS:	
A	2.813" ± 0.063
B	1.335" ± 0.125
C	1.625" ± 0.063
D	2.375" ± 0.063
E	0.701" ± 0.063
F	1.951" ± 0.063
G	0.187" ± 0.015



NOTE: ALL LEADS ARE 5" MIN. LONG OUT.
 OPERATING TEMPERATURE: -40°C TO 105°C
 STORAGE TEMPERATURE: -40°C TO 85°C
 MANUFACTURED USING CLASS B (130°C) MATERIALS.
 RoHS & REACH COMPLIANT

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 30V, 60Hz, 240mA DC, BLK - BLK	1H $\pm 15\%$
DCR	@ 20°C , BLK - BLK =	40.69 Ω $\pm 15\%$
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

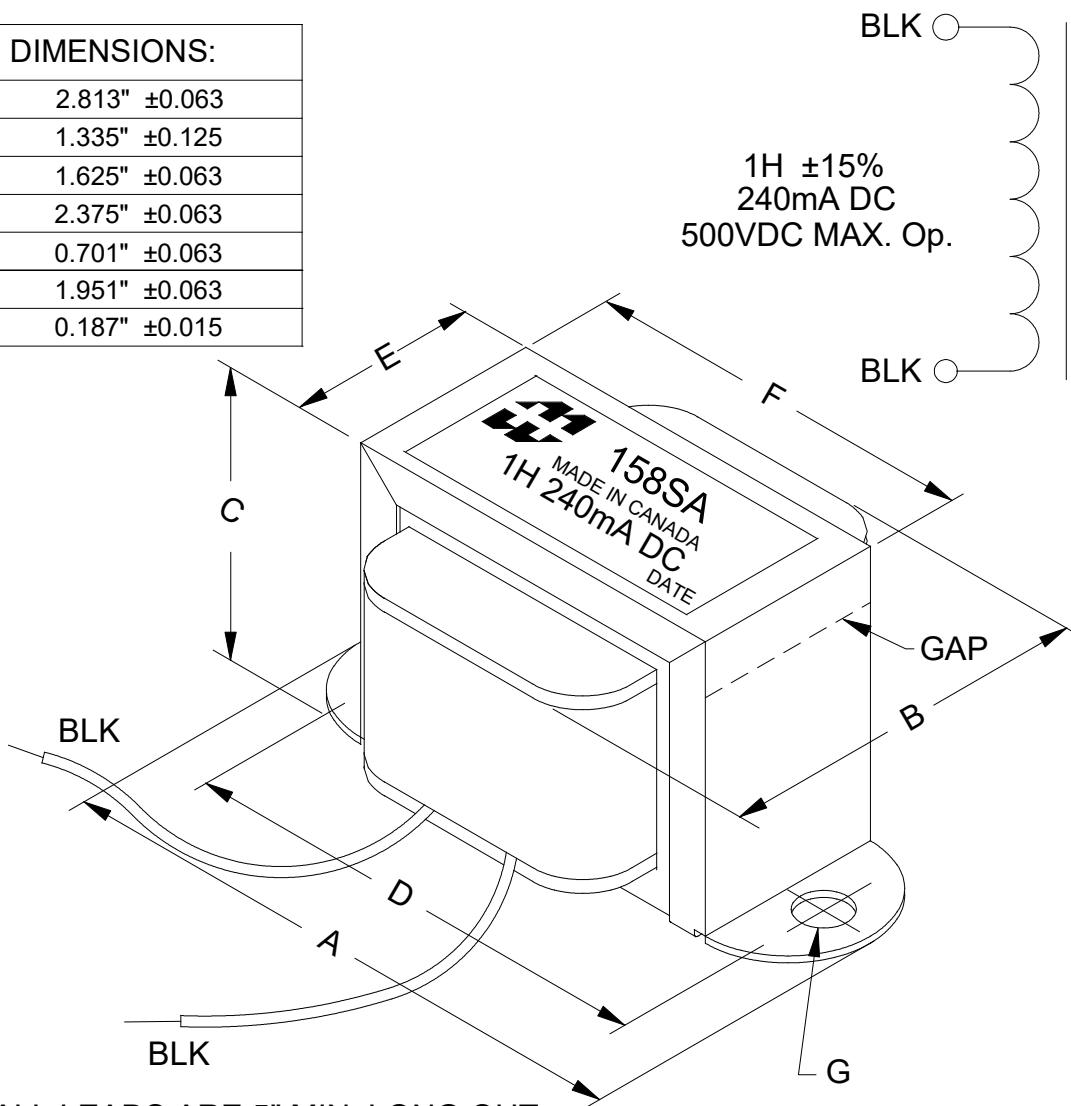

ELECTRONIC DIVISION
 52 RANKIN PLACE,
 WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181
 FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	10/01/12	RELEASED.	C.I.
1	04/25/25	REVISED DRAWING.	C.I.
			DATE
			10/01/12
			DIM IN(X)MM()

158SA