


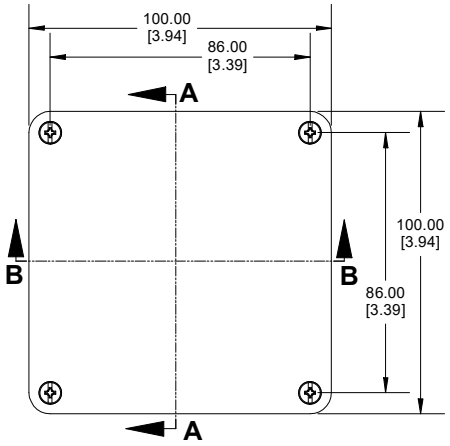


TOP VIEW

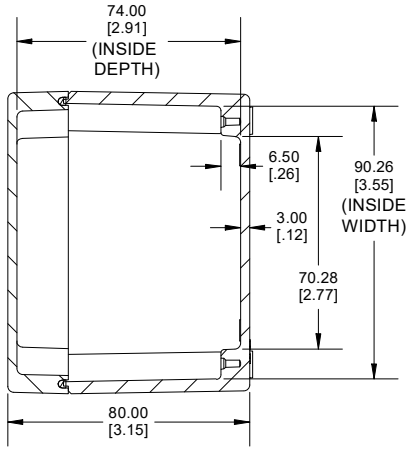


SECTION A-A
END VIEW

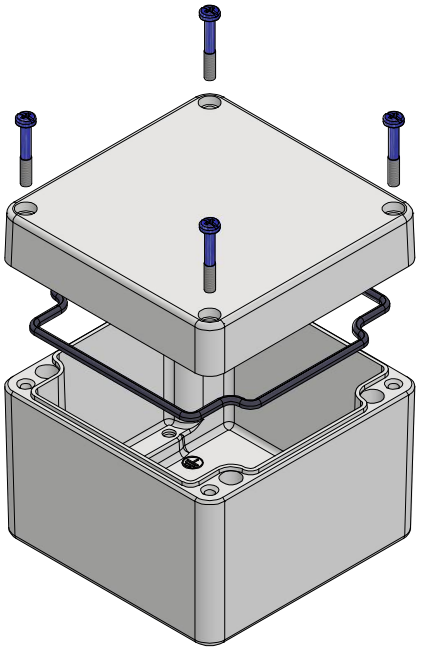


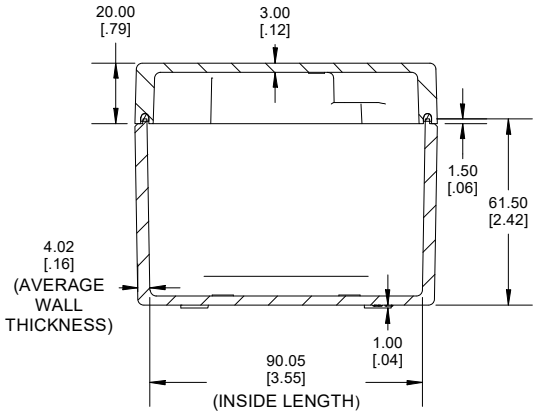


SECTION B-B
SIDE VIEW

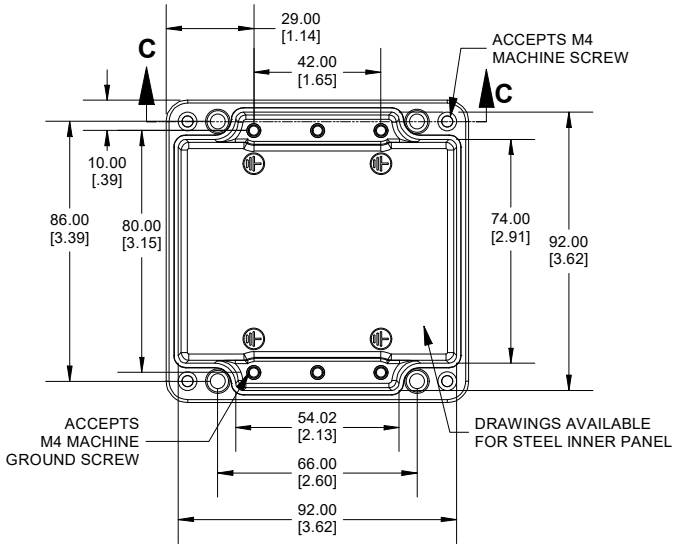

INSIDE BOX

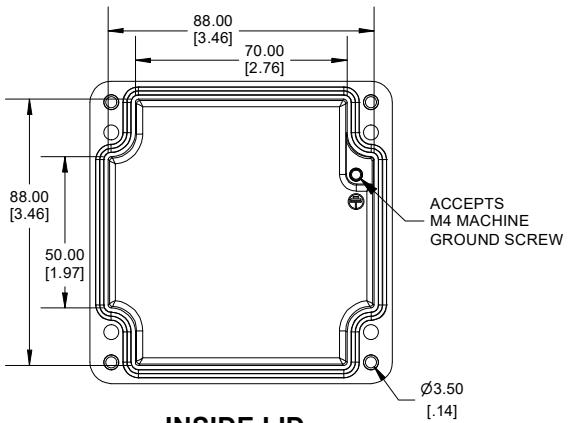

INSIDE LID

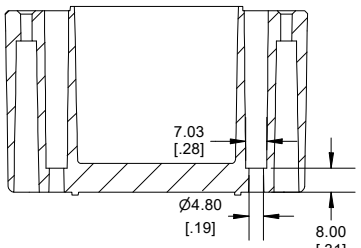

SECTION C-C
MOUNTING HOLE

c UL us LISTED
FILE #E65324
NEMA 4, 4X, 6, 6P

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammfg.com) for quotes
Solid models of this enclosure available in .stp or .x_t
(Part number and text placement/orientation on our products are subject to change, we do not recommend using them as a locating reference for modification purposes)

NOTE
Purchased assembly includes box, lid, silicone gasket, 4 cover screws and 2 ground screws with washers. Box and lid are made from Diecast Aluminum Alloy.
Recommended cover screw Torque 8.9-10.6 lbf.in (100 -120 cN.m)

1590Z080	
1590Z080 Enclosure	
Natural Enclosure	1590Z080
Black Enclosure	1590Z080BK
Grey Enclosure - RAL7001 Gloss	1590Z080GY
ACCESSORIES	
Steel Inner Panel	1590Z080PL
Pre-Formed Silicone Gasket (2 Pack)	1590Z080G
Copper Ground Hardware (50 Pack) [M4 - 0.7 X 6mm / M4 Washer]	SCGM4-50
Stainless Steel Cover screws (50 pkg) [M4 - 0.7 x 25mm PN]	SC583-50

Dimensions:
mm
[inches]

HAMMOND MANUFACTURING®

1590Z080

www.hammondmfg.com

REV: 13.04.2023