
DIMENSIONS:	
A	4.000" ±0.063
B	2.085" ±0.125
C	2.625" ±0.063
D	3.563" ±0.063
E	1.076" ±0.063
F	3.076" ±0.063
G	0.187" ±0.015

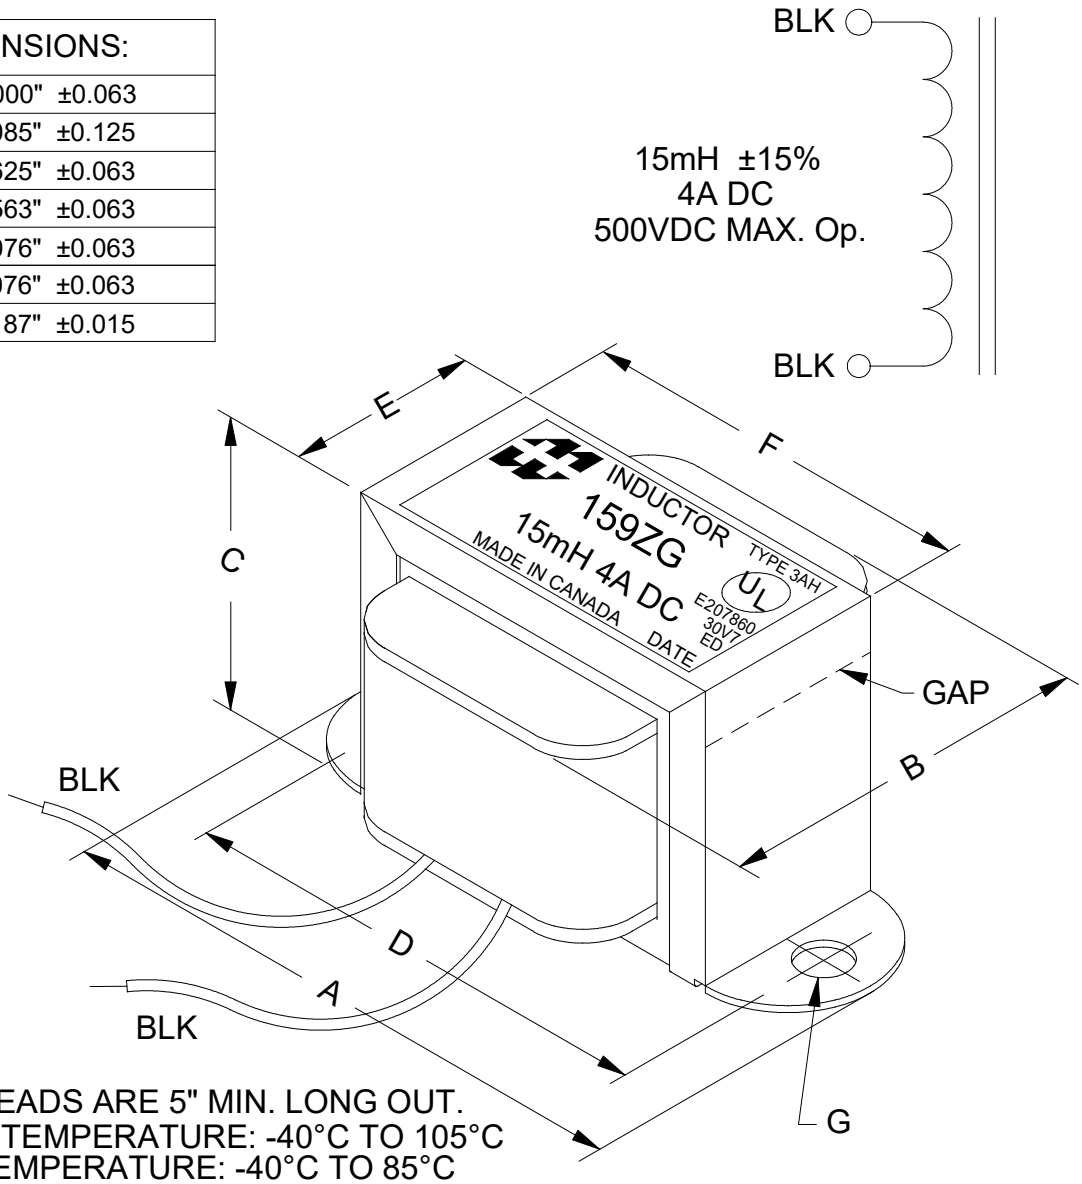

NOTE: ALL LEADS ARE 5" MIN. LONG OUT.
OPERATING TEMPERATURE: -40°C TO 105°C
STORAGE TEMPERATURE: -40°C TO 85°C
MANUFACTURED USING CLASS B (130°C) MATERIALS.
RoHS & REACH COMPLIANT

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 5V, 60Hz, 4A DC, BLK - BLK	15mH ±15%
DCR	@ 20°C, BLK - BLK =	0.200 Ω ±15%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

HAMMOND MANUFACTURING T.M.
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE: CHOKE

NO	DATE	REVISION	
0	07/26/19	RELEASED.	C.I.
1	11/06/24	ADDED "E" & "F" DIMENSIONS.	C.I.

DWG. BY: C. ILIE
DATE: 07/26/19
DIM IN(X)MM( )

159ZG