
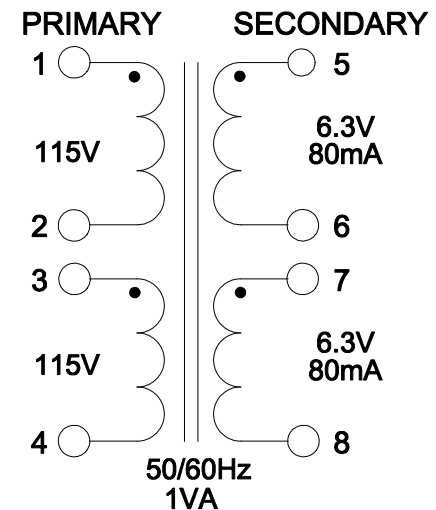


DIMENSIONS:	
A	1.000" ±0.031
B	1.360" ±0.031
C	0.815" ±0.063
D	0.018" X 0.041" ±0.005
E	1.200" ±0.031
G	0.200" ±0.031

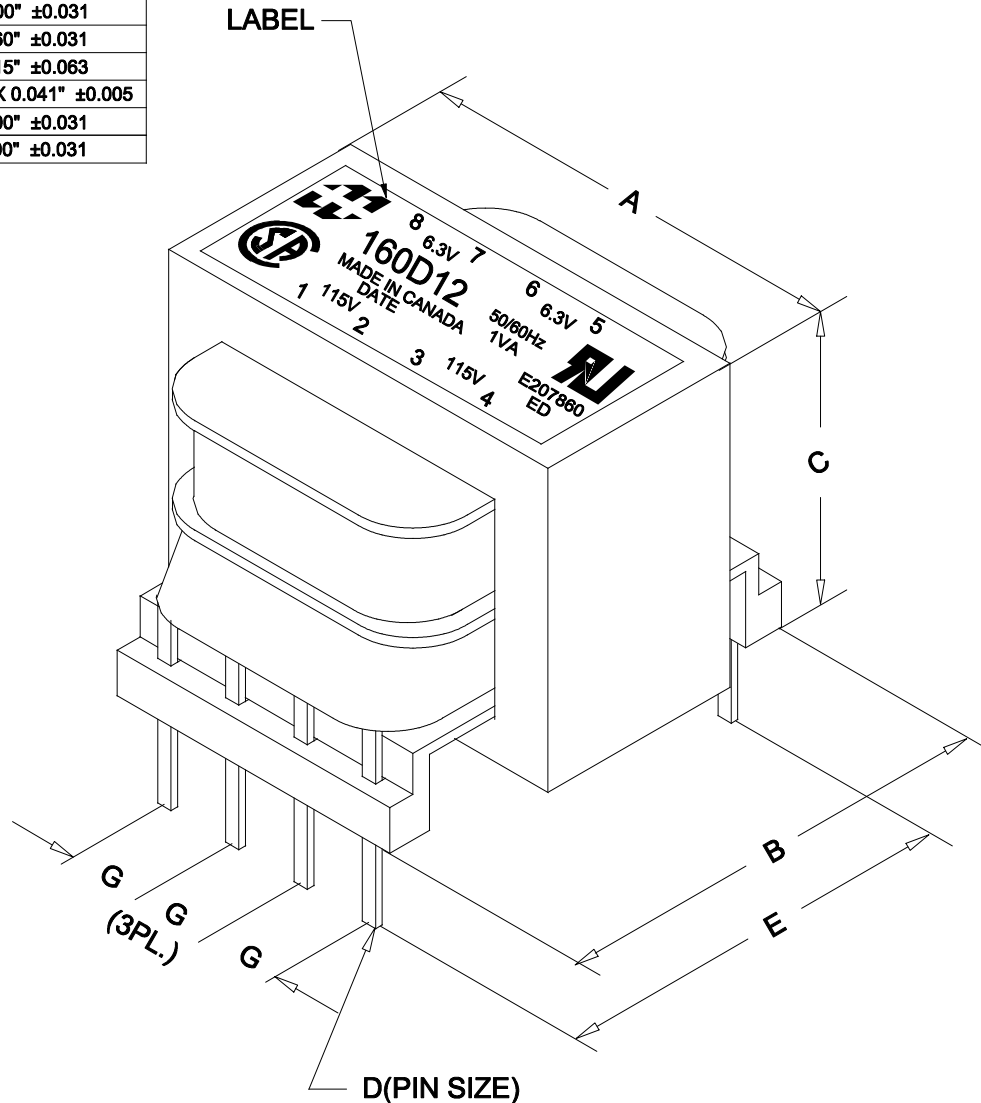

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 115V, 60Hz, PIN 1 - PIN 2	10mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	115.0V	±2%
	PIN 5 - PIN 6 =	7.680V	±2%
	PIN 7 - PIN 8 =	7.680V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	1.488kΩ	±20%
	@ 20°C, PIN 3 - PIN 4 =	1.617kΩ	±20%
	@ 20°C, PIN 5 - PIN 6 =	7.909 Ω	±20%
	@ 20°C, PIN 7 - PIN 8 =	7.909 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 10/28/19	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 160D12
			DATE: 10/28/19	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		