
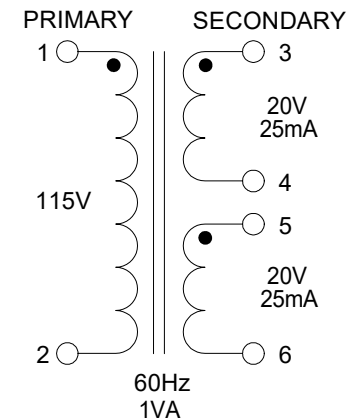


DIMENSIONS:

A	1.000" ±0.031
B	1.360" ±0.031
C	0.830" ±0.063
D	0.018" X 0.041" ±0.005
E	1.200" ±0.031
G	0.250" ±0.031

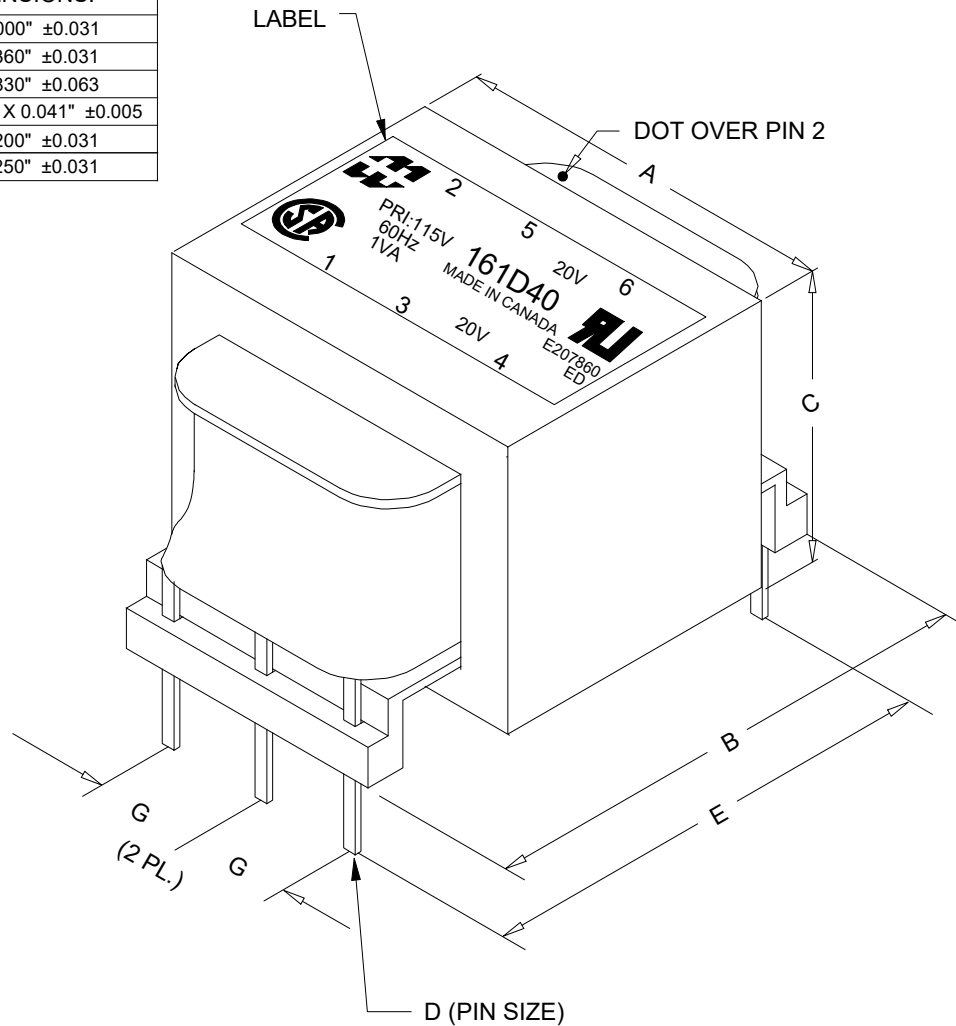

NOTE: RED DOT ABOVE PIN 2 DOES NOT REPRESENT POLARITY DOT. THE DOT REPRESENTS MECHANICAL START AND IT IS USED FOR MANUFACTURING PURPOSES ONLY.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 2	12mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	23.83V	±2%
	PIN 5 - PIN 6 =	23.83V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	546.5 Ω	±20%
	@ 20°C, PIN 3 - PIN 4 =	81.77 Ω	±20%
	@ 20°C, PIN 5 - PIN 6 =	88.17 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 03/16/26	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 161D40
			DATE: 03/16/26	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		