
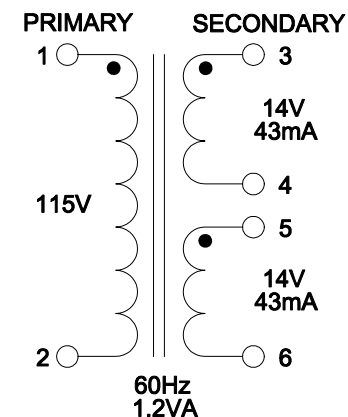


DIMENSIONS:

A	1.451" ±0.031
B	1.130" ±0.031
C	1.245" ±0.063
D	0.018" X 0.041" ±0.005
E	1.000" ±0.031
G	0.312" ±0.031

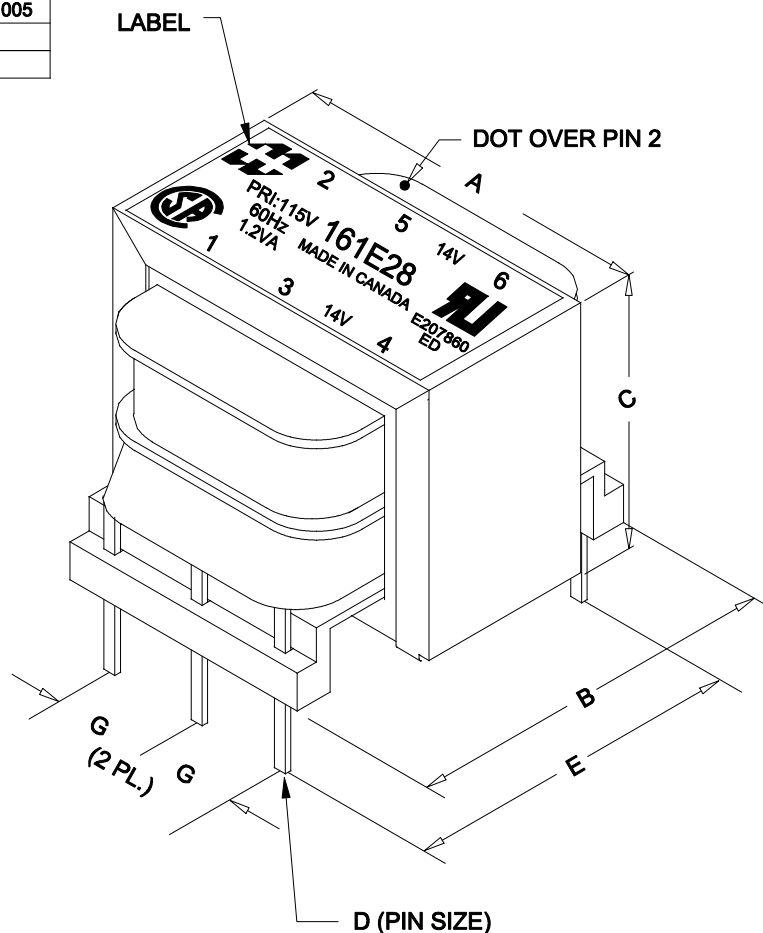

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 2	20mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	16.10V	±2%
	PIN 5 - PIN 6 =	16.10V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	443.7 Ω	±20%
	@ 20°C, PIN 3 - PIN 4 =	16.65 Ω	±20%
	@ 20°C, PIN 5 - PIN 6 =	21.77 Ω	±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 12/03/18	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 161E28
			DATE: 12/03/18	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540