
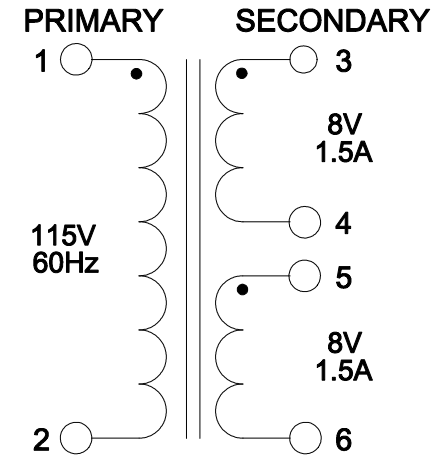


DIMENSIONS:	
A	1.625" ± 0.063
B	2.226" ± 0.063
C	1.375" ± 0.063
D	0.018" X 0.041" ± 0.005
E	2.100" ± 0.030
F	0.190" ± 0.005
G	0.400" ± 0.005

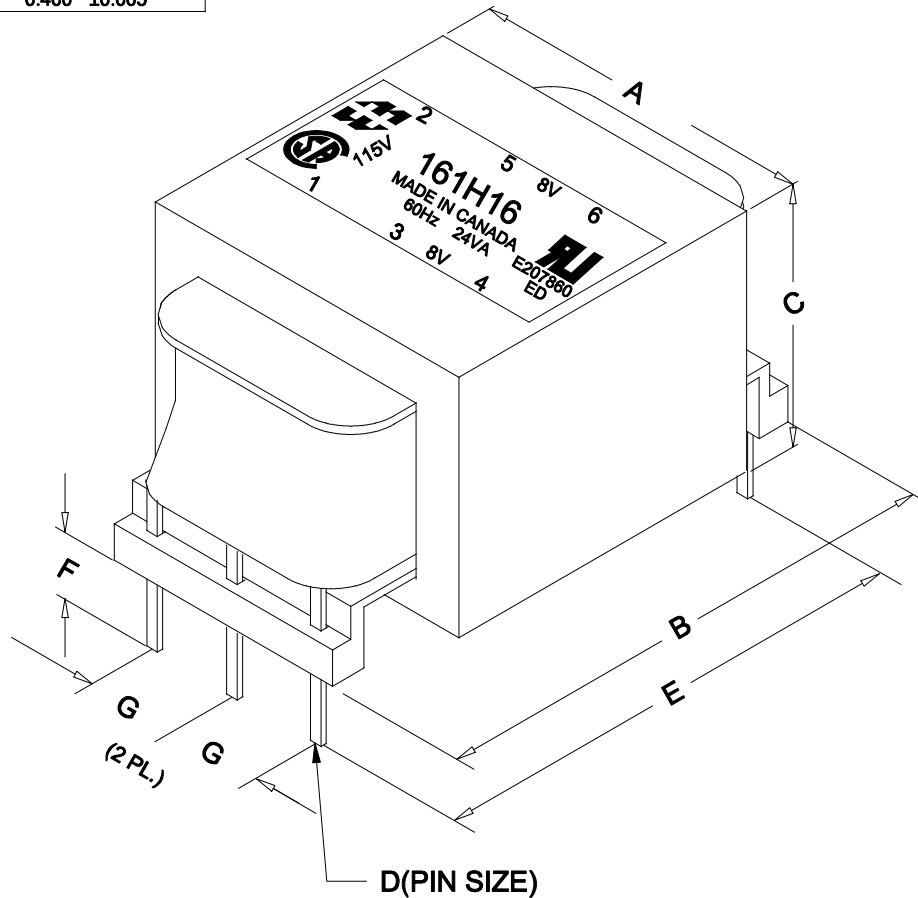

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, PIN 1 - PIN 2	145mA Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2	
	PIN 3 - PIN 4 =	9.092V $\pm 2\%$
	PIN 5 - PIN 6 =	9.092V $\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 2 =	23.72 Ω $\pm 20\%$
	@ 20°C, PIN 3 - PIN 4 =	0.342 Ω $\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	0.342 Ω $\pm 20\%$
HI POT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION		DATE	 HAMMOND MANUFACTURING™		ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	C.I.	12/09/21			52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
				DWG. BY: C. ILIE		TITLE: PC BOARD MOUNT POWER TRANSFORMER		
				CHK'D BY:				
				DATE: 12/09/21		DWG. NO. 161H16		
				APP'D. BY:				
				DIMENSIONS: IN(X) MM()				