
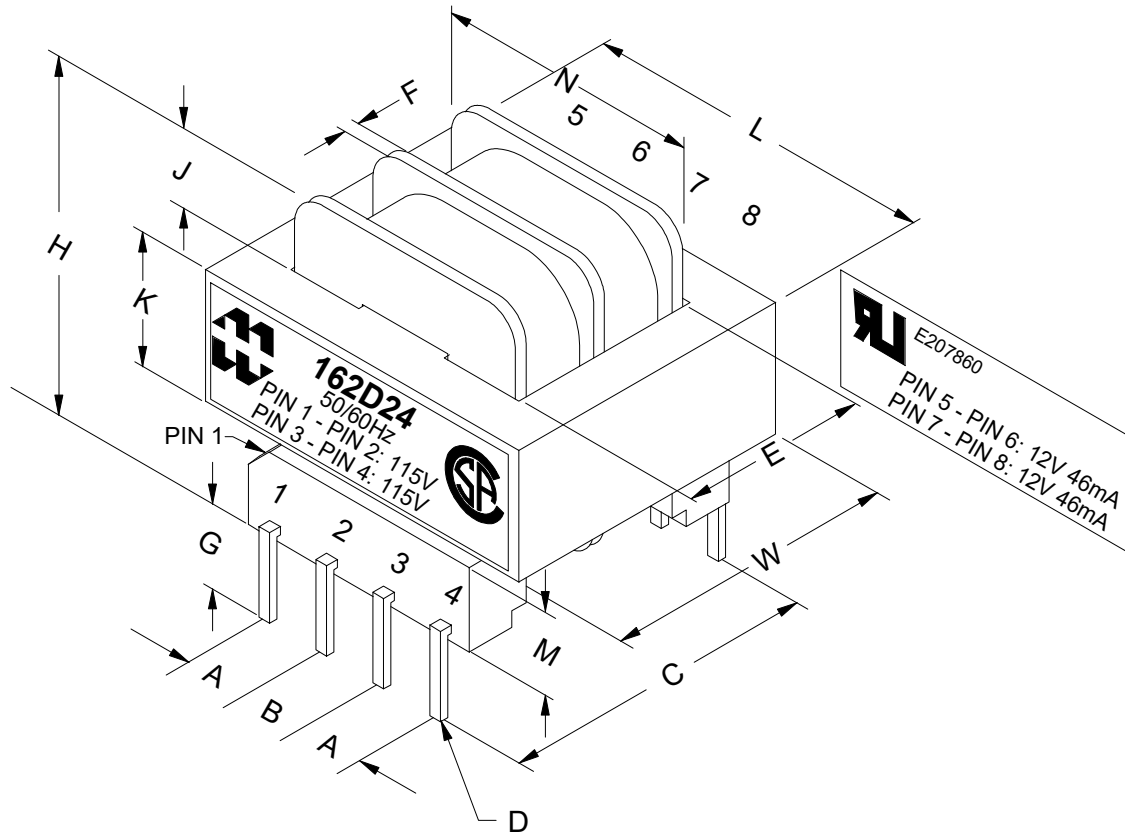


DIMENSIONS:	
A	0.250" ± 0.030
B	0.250" ± 0.030
C	1.220" ± 0.030
D	0.041" x 0.018" ± 0.005
E	0.735" ± 0.030
F	0.040" ± 0.005
G	0.234" ± 0.005

DIMENSIONS:	
H	0.930" ± 0.030
J	0.290" ± 0.030
K	0.270" ± 0.030
L	1.375" ± 0.030
M	0.350" ± 0.030
N	0.970" ± 0.030
W	1.125" ± 0.030

PRIMARY SECONDARY

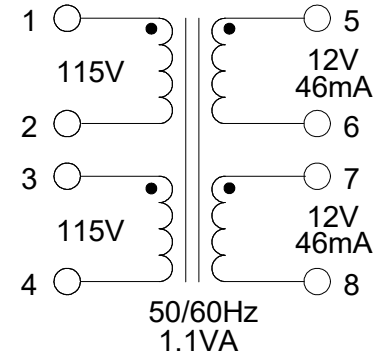

PIN #'S EMBOSSED
ON BOBBIN FLANGE

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 115V, 60Hz, PIN 1 - PIN 2	14.4mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	115.0V	$\pm 2\%$
	PIN 5 - PIN 6 =	16.42V	$\pm 2\%$
	PIN 7 - PIN 8 =	16.42V	$\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 2 =	1.593k Ω	$\pm 20\%$
	@ 20°C, PIN 3 - PIN 4 =	2.138k Ω	$\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	34.92 Ω	$\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	47.02 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION		DATE	 HAMMOND MANUFACTURING ™		ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540	
0	RELEASED.	C.I.	04/19/24			52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
				DWG. BY: C. ILIE		CHK'D BY:		TITLE: PC BOARD MOUNT POWER TRANSFORMER	DWG. NO. 162D24
				DATE: 04/19/24		APP'D. BY:			
						DIMENSIONS: IN(X) MM()			