



DIMENSIONS:	
A	0.250" ± 0.030
B	0.250" ± 0.030
C	1.220" ± 0.030
D	0.041" x 0.018" ± 0.005
E	0.735" ± 0.030
F	0.040" ± 0.005
G	0.234" ± 0.005

DIMENSIONS:	
H	1.170" ± 0.030
J	0.290" ± 0.030
K	0.530" ± 0.030
L	1.375" ± 0.030
M	0.350" ± 0.030
N	0.970" ± 0.030
W	1.125" ± 0.030

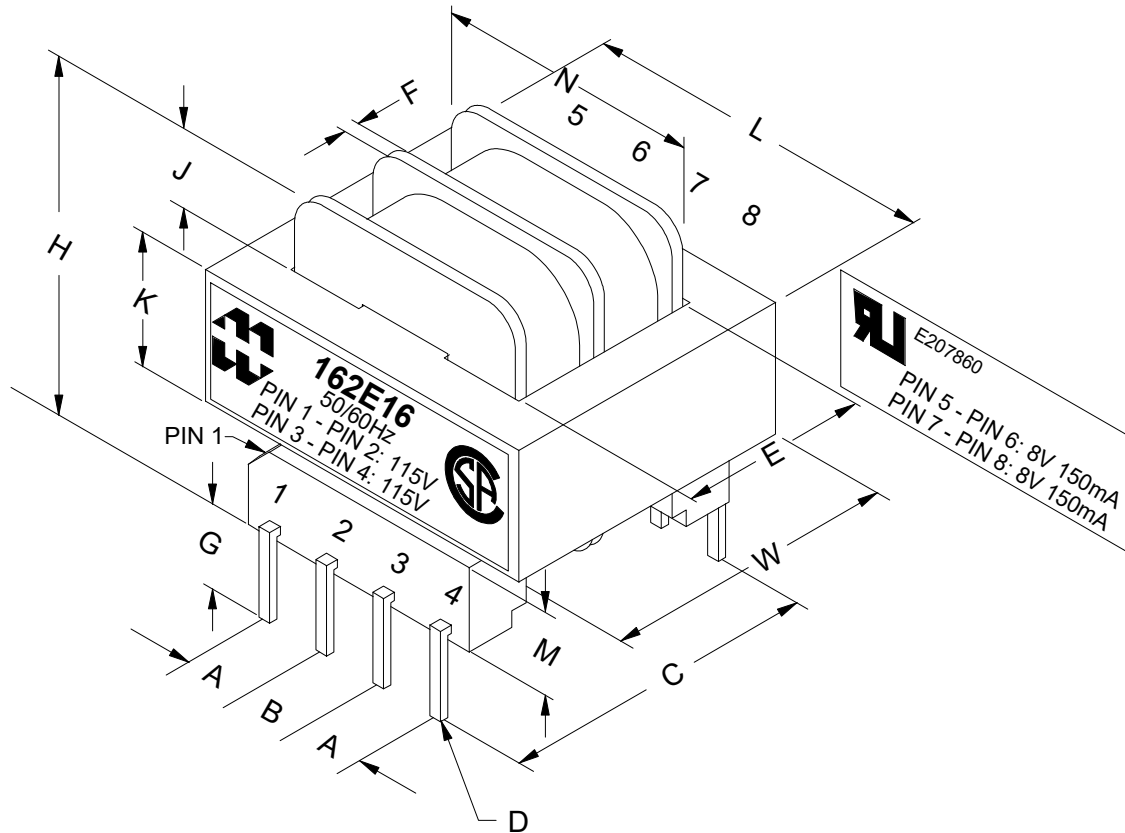

PIN #'S EMBOSSED
ON BOBBIN FLANGE

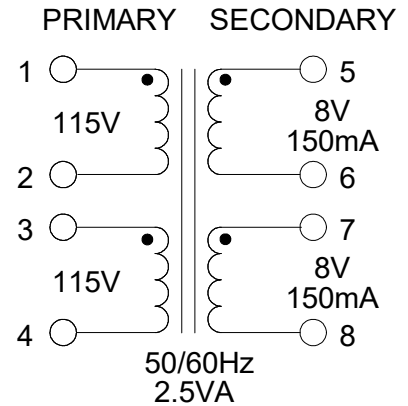

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 115V, 60Hz, PIN 1 - PIN 2	26.4mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	115.0V	$\pm 2\%$
	PIN 5 - PIN 6 =	9.724V	$\pm 2\%$
	PIN 7 - PIN 8 =	9.724V	$\pm 2\%$
DCR	@ 20°C, PIN 1 - PIN 2 =	572.8 Ω	$\pm 20\%$
	@ 20°C, PIN 3 - PIN 4 =	572.8 Ω	$\pm 20\%$
	@ 20°C, PIN 5 - PIN 6 =	3.920 Ω	$\pm 20\%$
	@ 20°C, PIN 7 - PIN 8 =	3.920 Ω	$\pm 20\%$
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING ELECTRONIC DIVISION			
0	RELEASED.	C.I. 03/19/24	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT	DWG. NO.
			DATE: 03/19/24	APP'D. BY:	POWER TRANSFORMER	162E16
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540