
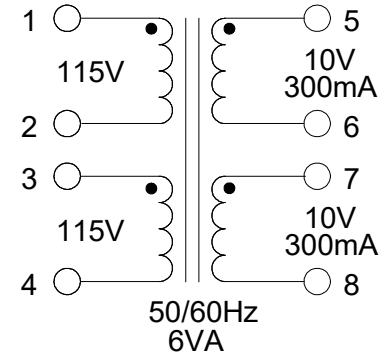


DIMENSIONS:	
A	0.250" ±0.030
B	0.350" ±0.030
C	1.280" ±0.030
D	0.041" x 0.018" ±0.005
E	0.790" ±0.030
F	0.040" ±0.005
G	0.234" ±0.005

DIMENSIONS:	
H	1.290" ±0.030
J	0.290" ±0.030
K	0.650" ±0.030
L	1.625" ±0.030
M	0.350" ±0.030
N	1.100" ±0.030
W	1.313" ±0.030

DIMENSIONS:	
P	0.125" ±0.015
Q	1.063" ±0.030
R	0.125" ±0.015

PRIMARY SECONDARY

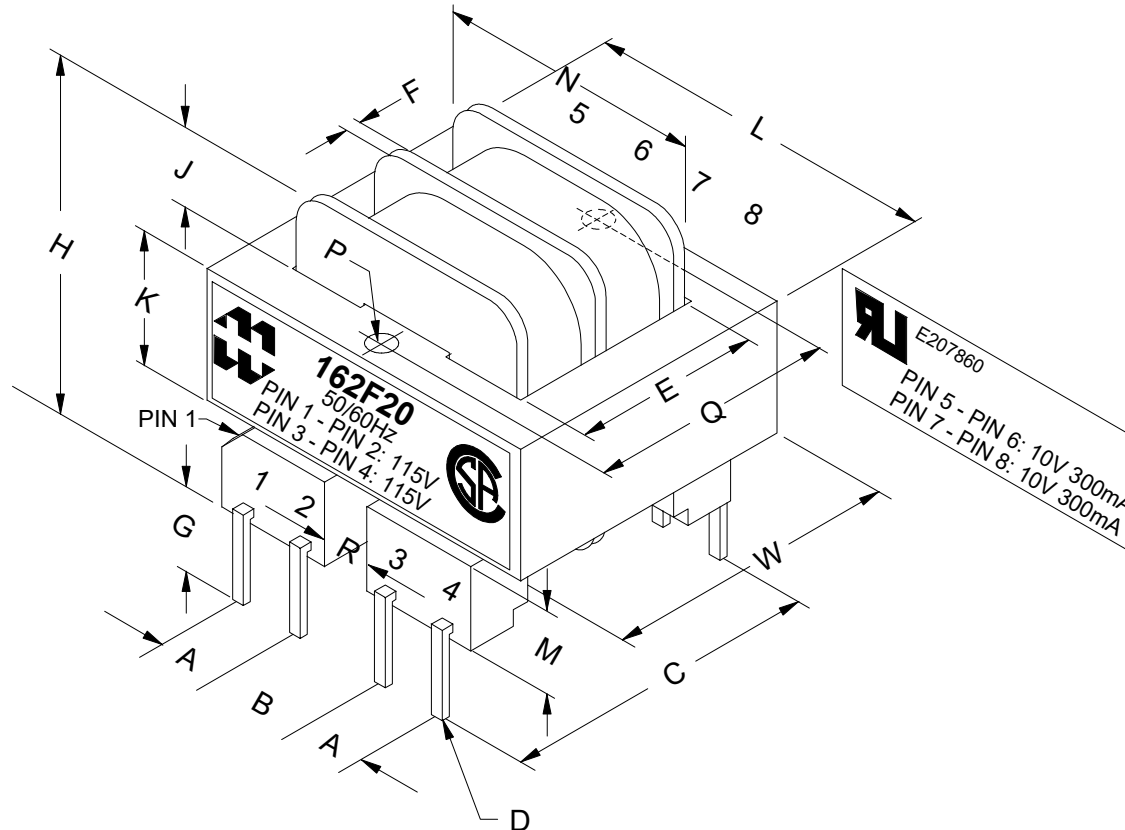

PIN #'S EMBOSSED
ON BOBBIN FLANGE

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 115V, 60Hz, PIN 1 - PIN 2	45.6mA	Max.
Sec. N.L.V	@ 115V, 60Hz, PIN 1 - PIN 2		
	PIN 3 - PIN 4 =	115.0V	±2%
	PIN 5 - PIN 6 =	12.04V	±2%
	PIN 7 - PIN 8 =	12.04V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	257.9 Ω	±20%
	@ 20°C, PIN 3 - PIN 4 =	257.9 Ω	±20%
	@ 20°C, PIN 5 - PIN 6 =	2.694 Ω	±20%
	@ 20°C, PIN 7 - PIN 8 =	2.694 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING ELECTRONIC DIVISION			
0	RELEASED.	C.I. 02/24/20	52 RANKIN PLACE,			
1	ADDED MORE DIMENSIONS.	C.I. 03/23/24	WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PC BOARD MOUNT POWER TRANSFORMER	
			DATE: 02/24/20	APP'D. BY:		
				DIMENSIONS: IN(X) MM ()	DWG. NO. 162F20	