



DIMENSIONS:

A	2.063" ±0.063
B	1.350" ±0.125
C	1.245" ±0.063
D	1.750" ±0.063
E	0.576" ±0.063
F	1.451" ±0.063
G	0.187" ±0.015

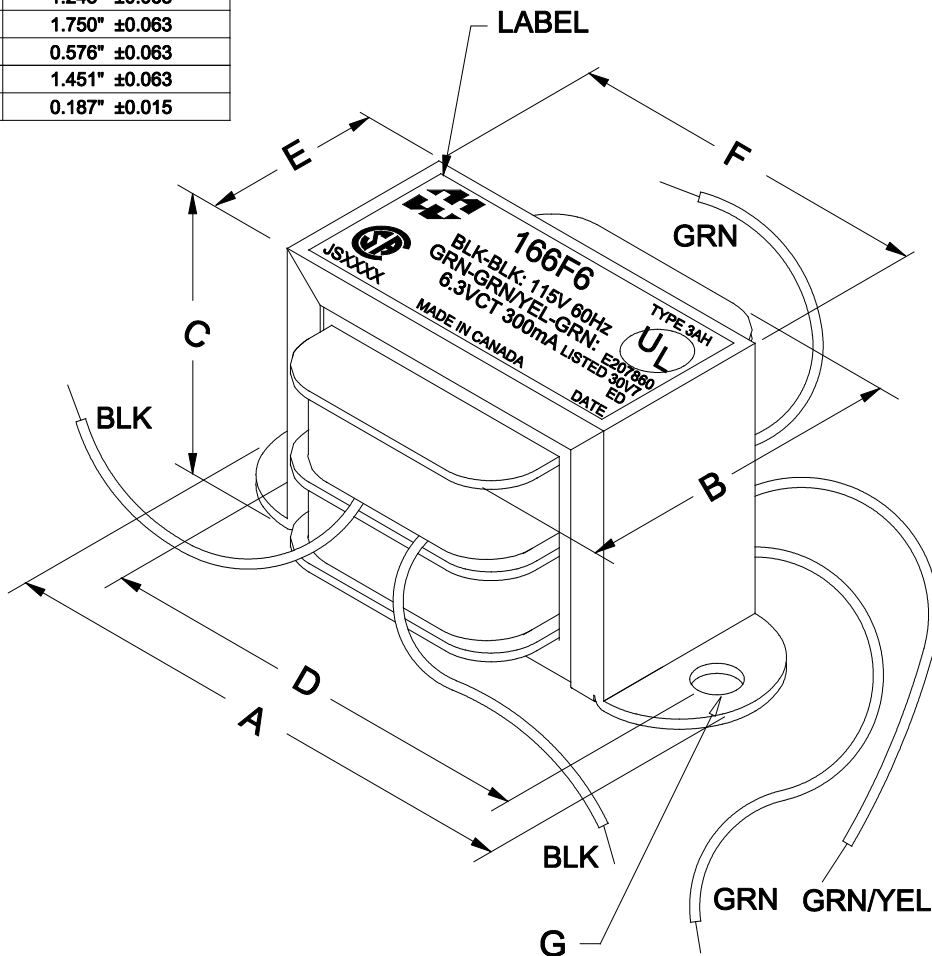

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"



ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	26.4mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	7.604V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.802V ±2%
DCR	@ 20°C, BLK - BLK =	340.9 Ω ±20%
	@ 20°C, GRN - GRN =	1.690 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION		DATE	 HAMMOND MANUFACTURING™		ELECTRONIC DIVISION	
0	RELEASED.	C.I.	02/03/15	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540	
				DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 166F6
				DATE: 02/03/15	APP'D. BY:		
				DIMENSIONS: IN(X) MM()			