



DIMENSIONS:

A	3.250" ±0.063
B	1.750" ±0.125
C	1.995" ±0.063
D	2.813" ±0.063
E	0.826" ±0.063
F	2.326" ±0.063
G	0.187" ±0.015

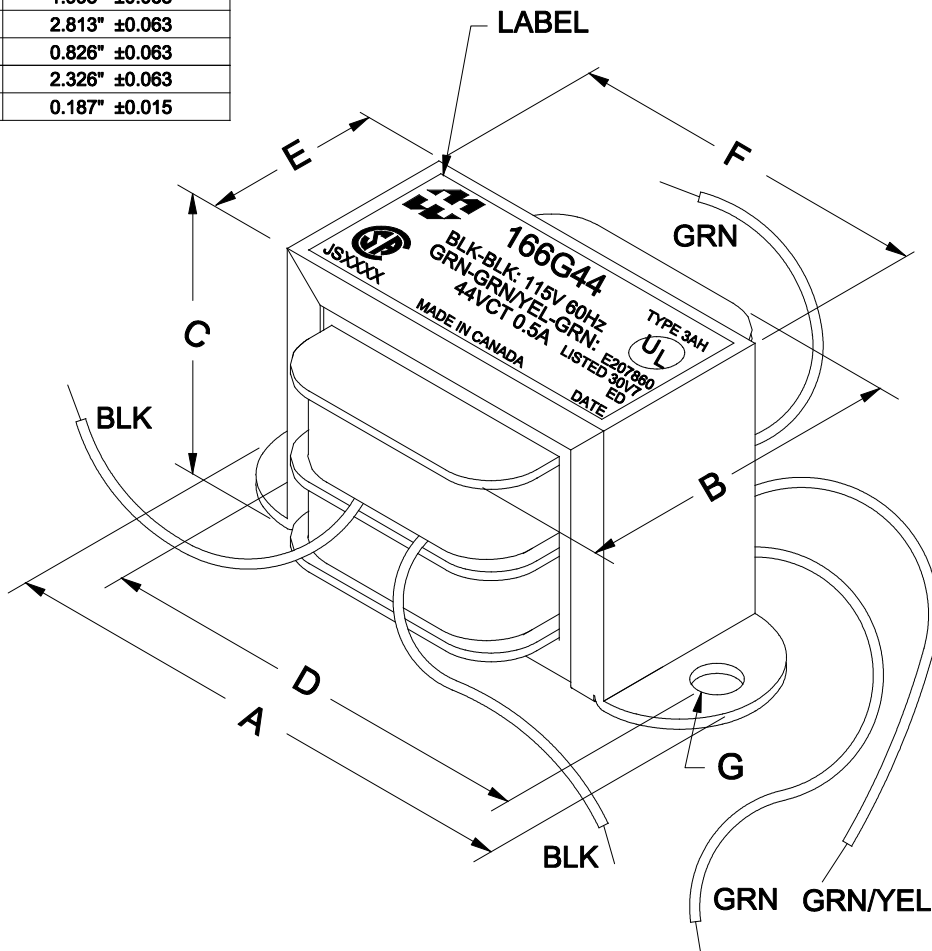

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"



APPROX. WEIGHT: 1LBS.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	45mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	51.81V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	25.91V ±2%
DCR	@ 20°C, BLK - BLK =	35.27 Ω ±20%
	@ 20°C, GRN - GRN =	7.695 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 10/18/23	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 166G44
			DATE: 10/18/23	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540