



DIMENSIONS:	
A	2.188" ±0.063
B	2.375" ±0.125
C	2.625" ±0.063
D	1.750" ±0.063
E	1.313" ±0.063
G	0.188" X 0.250" ±0.015

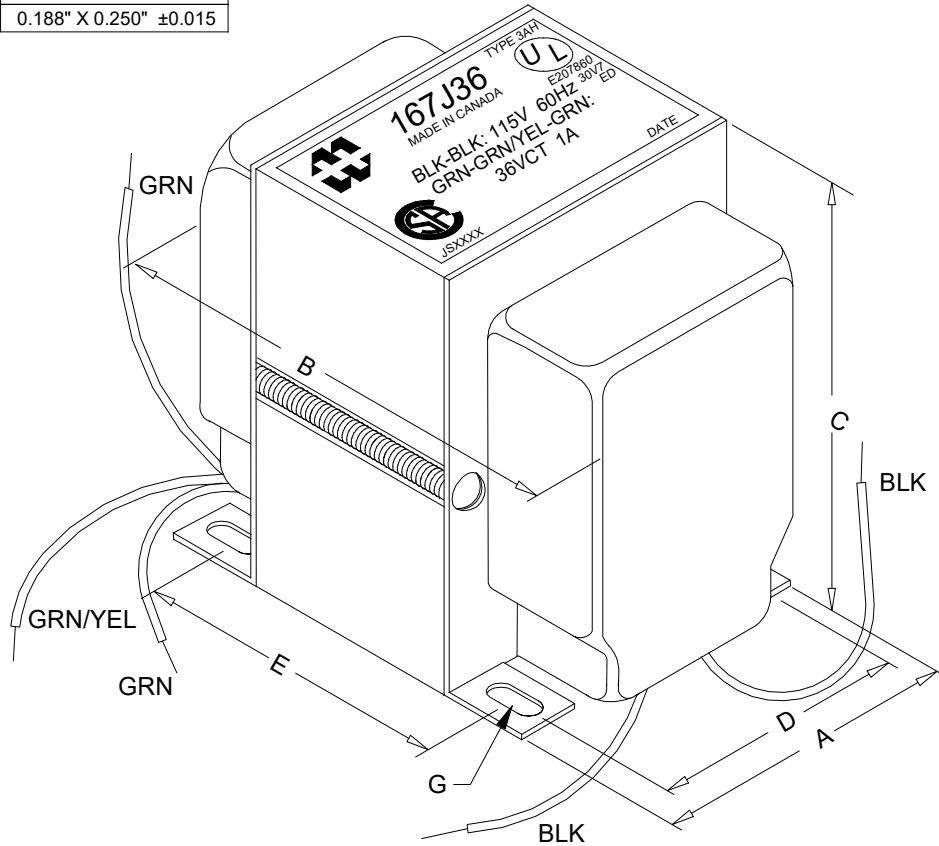

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	118mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	39.90V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	19.95V ±2%
DCR	@ 20°C, BLK - BLK =	14.45 Ω ±20%
	@ 20°C, GRN - GRN =	1.930 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING			
0	RELEASED.	C.I. 05/26/26	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER	DWG. NO.
			DATE: 05/26/26	APP'D. BY:	TRANSFORMER	167J36
				DIMENSIONS: IN(X) MM()		