
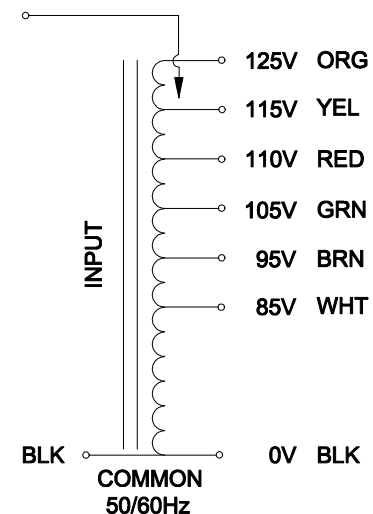


DIMENSIONS:

A	3.750" ±0.063
B	5.435" ±0.125
C	4.530" ±0.063
D	3.000" ±0.063
E	4.313" ±0.063
G	0.203" x 0.375" ±0.015

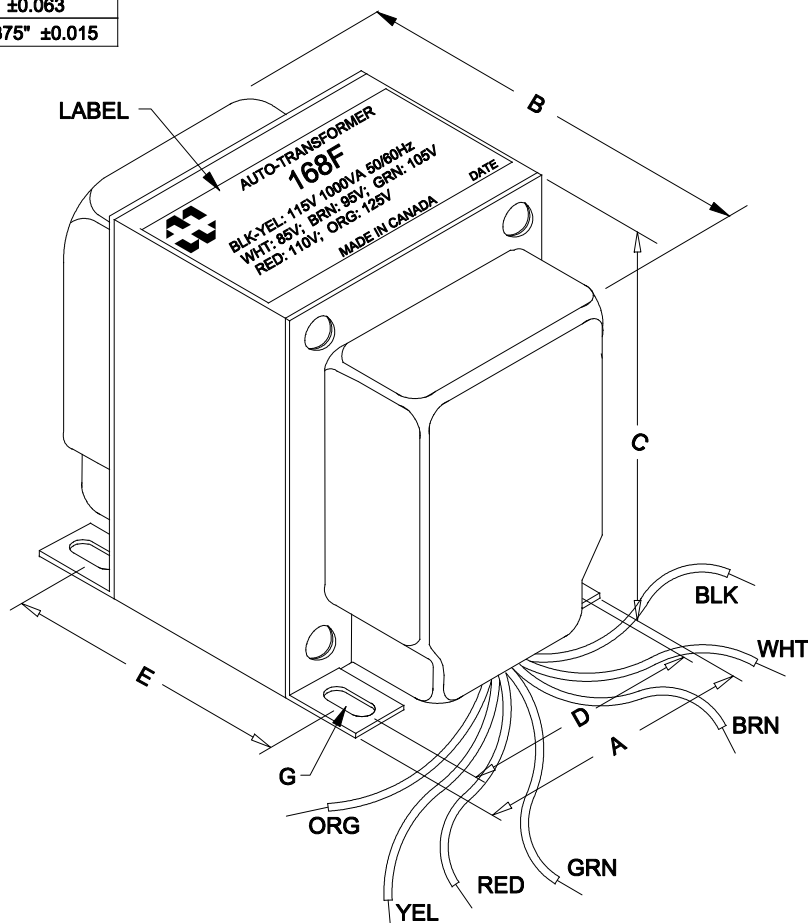

NOTE: ALL LEADS 8" OUT MIN.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, BLK - YEL	260.4mA	Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - YEL		
	BLK - WHT =	85.35V	±2%
	BLK - BRN =	95.47V	±2%
	BLK - GRN =	105.6V	±2%
	BLK - RED =	110.7V	±2%
	BLK - ORG =	125.9V	±2%
DCR	@ 20°C, BLK - WHT =	0.323 Ω	±20%
	@ 20°C, BLK - BRN =	0.340 Ω	±20%
	@ 20°C, BLK - GRN =	0.357 Ω	±20%
	@ 20°C, BLK - RED =	0.367 Ω	±20%
	@ 20°C, BLK - YEL =	0.375 Ω	±20%
	@ 20°C, BLK - ORG =	0.396 Ω	±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED. C.I.	10/06/15	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: AUTO TRANSFORMER	DWG. NO. 168F
			DATE: 10/06/15	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		