
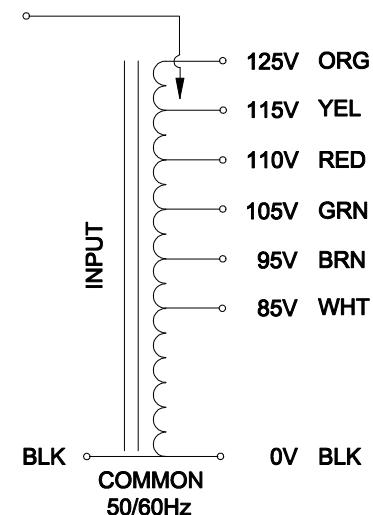


DIMENSIONS:

A	4.375" ±0.063
B	6.096" ±0.125
C	5.300" ±0.063
D	3.500" ±0.063
E	4.500" ±0.063
G	0.281" x 0.625" ±0.015

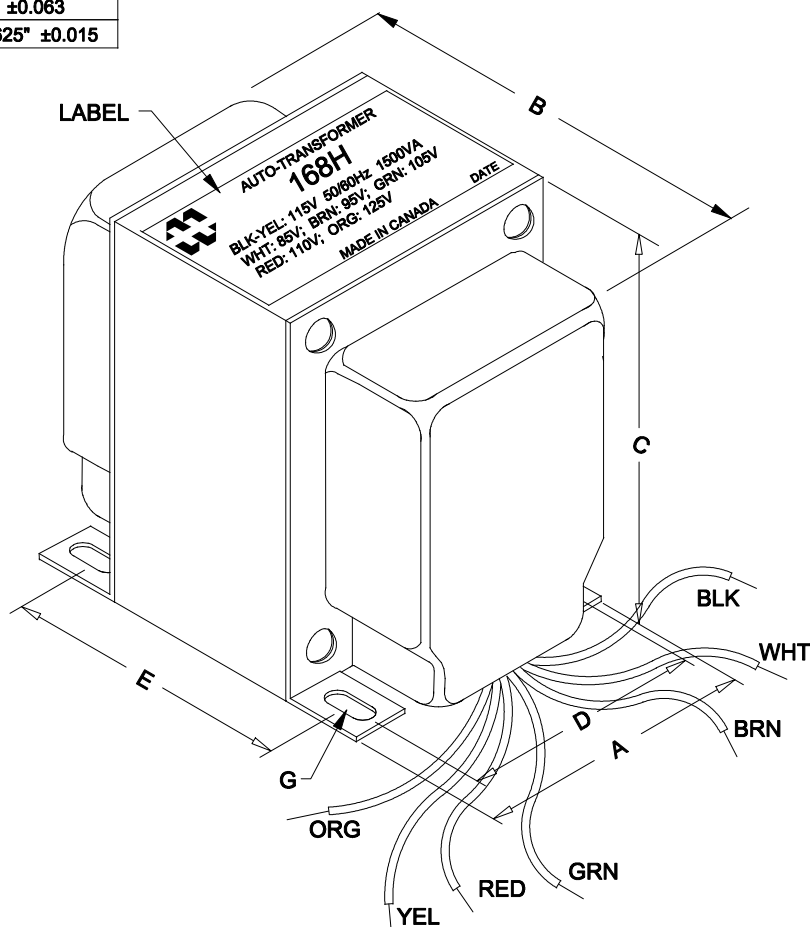

NOTE: ALL LEADS 8" OUT MIN.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, BLK - YEL	250mA	Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - YEL		
	BLK - WHT =	85.07V	±2%
	BLK - BRN =	95.31V	±2%
	BLK - GRN =	105.5V	±2%
	BLK - RED =	110.3V	±2%
	BLK - ORG =	125.2V	±2%
DCR	@ 20°C, BLK - WHT =	0.200 Ω	±20%
	@ 20°C, BLK - ORG =	0.247 Ω	±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 07/07/22	ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: AUTO TRANSFORMER	DWG. NO.
			DATE: 07/07/22	APP'D. BY:		168H
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540