
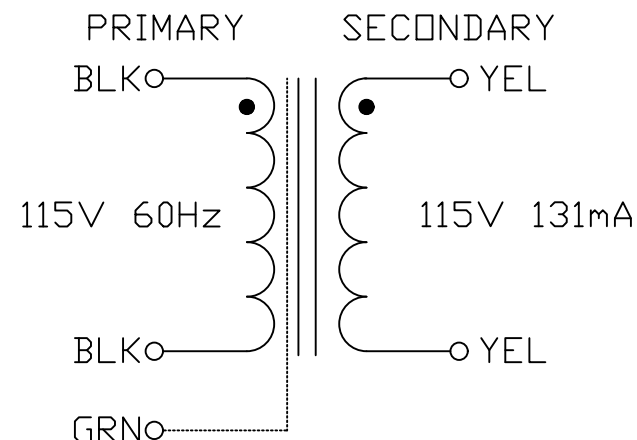


DIMENSIONS:	
A	1.875" ± 0.063
B	2.031" ± 0.125
C	2.468" ± 0.063
D	1.500" ± 0.063
E	1.188" ± 0.063
F	1.625" ± 0.063
G	0.188" x 0.313" ± 0.015

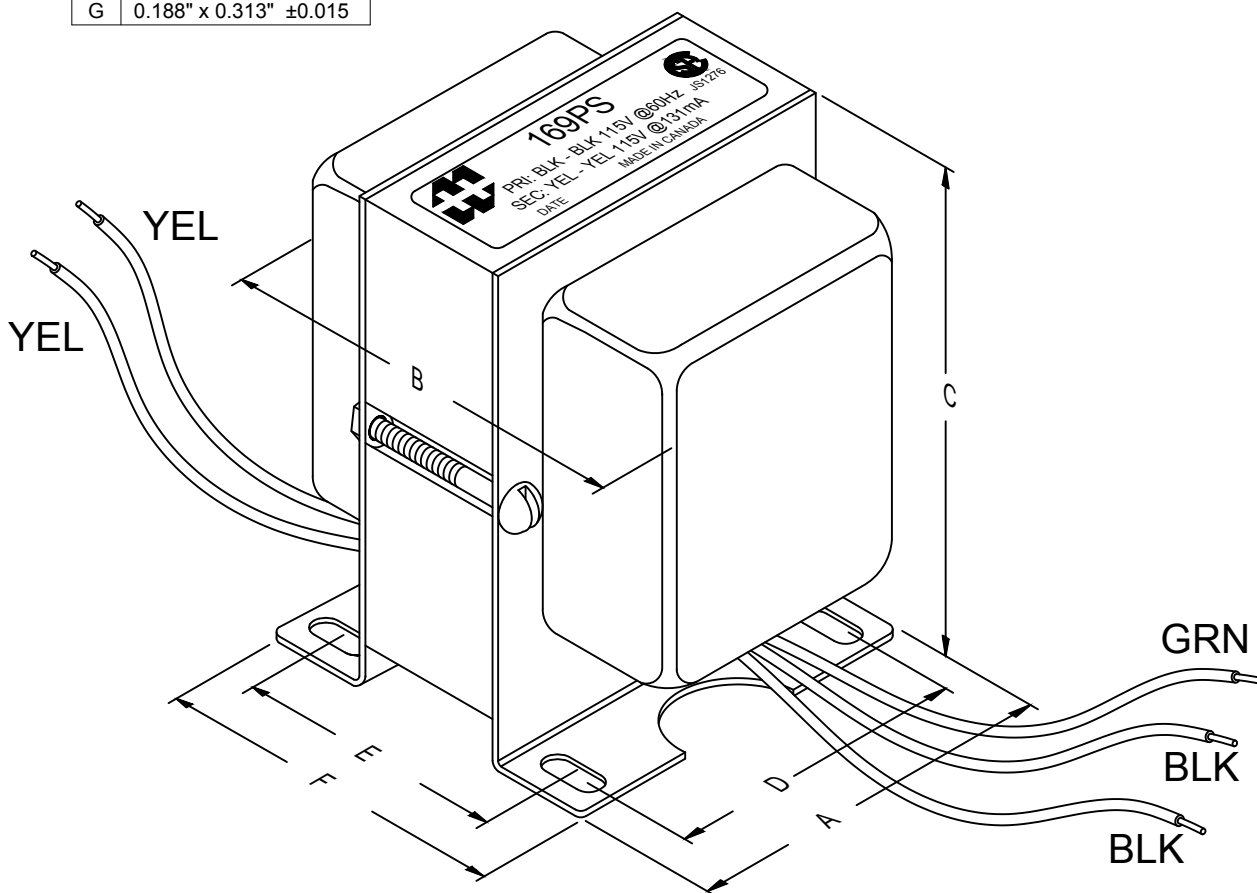

NOTE: ALL LEADS 8" OUT MIN.

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 115V, 60Hz, BLK - BLK	105.6mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	YEL - YEL =	129.7V $\pm 2\%$
DCR	@ 20°C, BLK - BLK =	38.40 Ω $\pm 20\%$
	@ 20°C, YEL - YEL =	54.00 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	ELECTRONIC DIVISION			
0	RELEASED.	12/03/18	52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: LINE ISOLATING	DWG. NO.
			DATE: 12/03/18	APP'D. BY:	TRANSFORMER	169PS
				DIMENSIONS: IN(X) MM()		

