
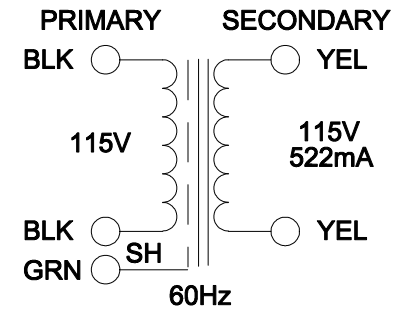


DIMENSIONS:

A	2.500" ±0.063
B	2.686" ±0.125
C	3.046" ±0.063
D	2.000" ±0.063
E	1.688" ±0.063
F	2.400" ±0.063
G	0.203" x 0.375" ±0.015

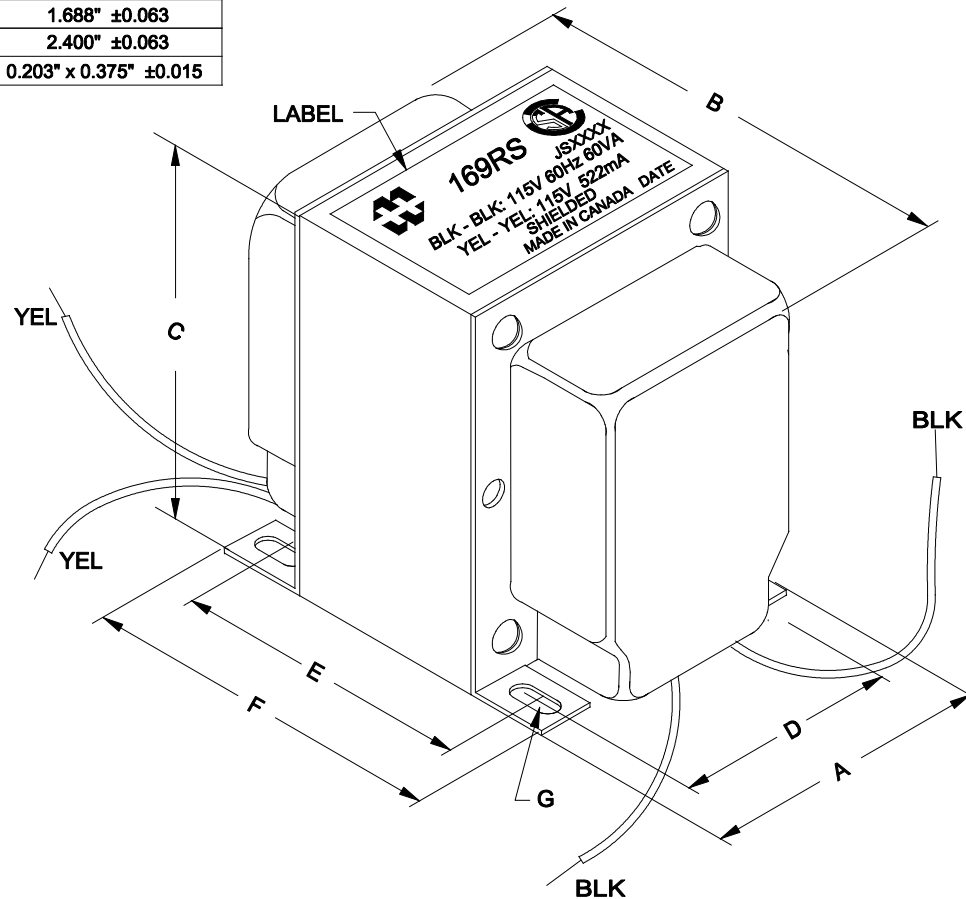

NOTE: ALL LEADS 9" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, BLK - BLK	296mA	Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK		
	YEL - YEL =	123.8V	±2%
DCR	@ 20°C, BLK - BLK =	5.978 Ω	±20%
	@ 20°C, YEL - YEL =	7.631 Ω	±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 02/05/19	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: LINE ISOLATING TRANSFORMER	DWG. NO. 169RS
			DATE: 02/05/19	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540