


DIMENSIONS:	
A	4.375" ±0.063
B	7.500" ±0.125
C	5.300" ±0.063
D	3.500" ±0.063
E	5.909" ±0.063
G	0.281" x 0.625" ±0.015

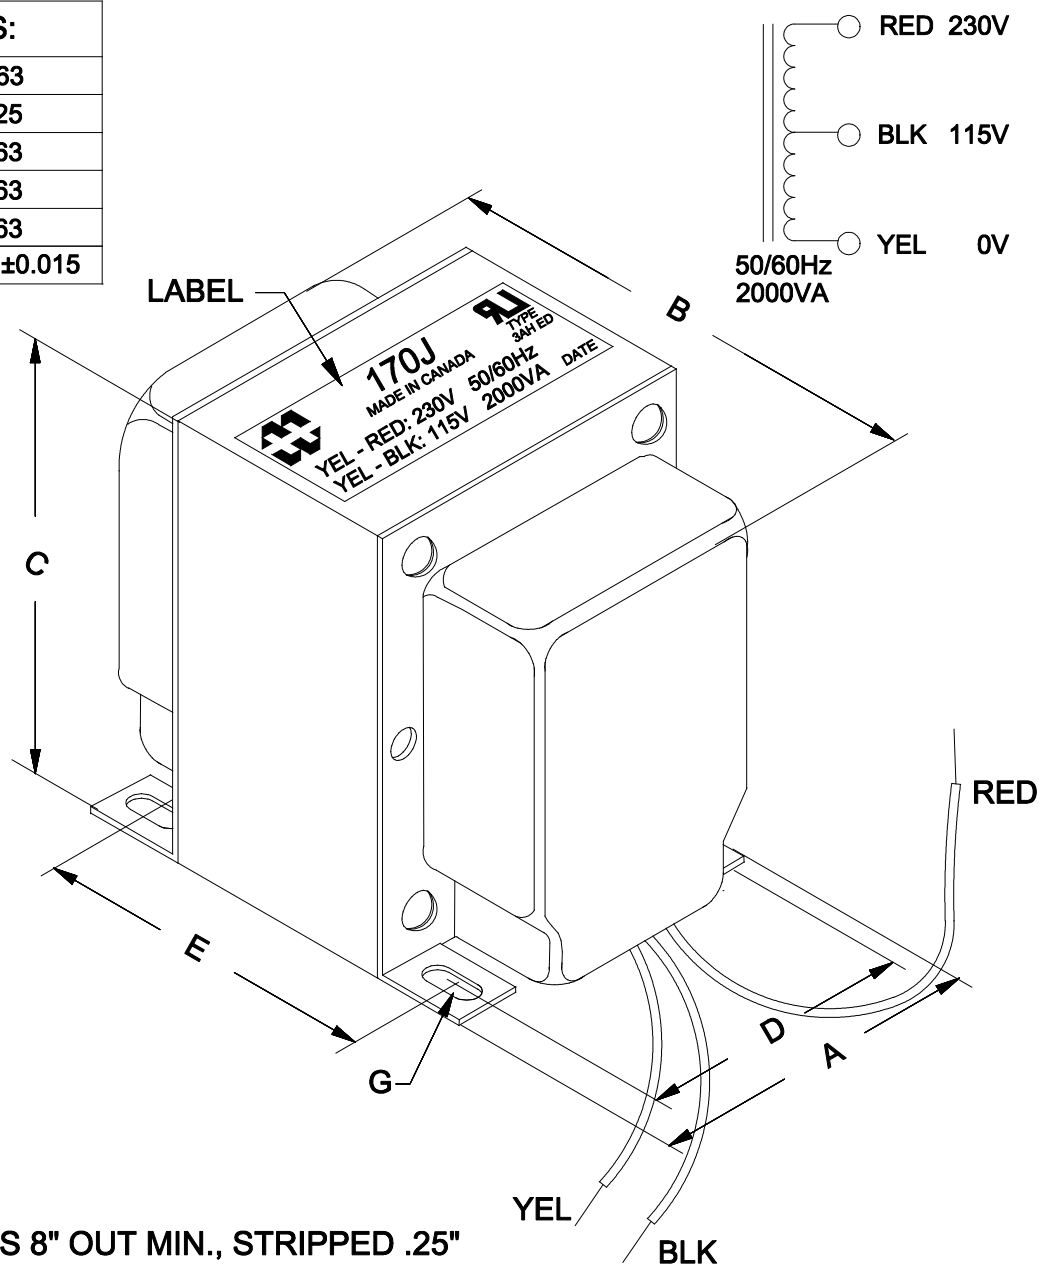

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .25"

ELECTRICAL DATA:			
TESTS		CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}		@ 230V, 60Hz, YEL - RED	662mA MAX.
Sec. N.L.V.		@ 230V, 60Hz, YEL - RED	
		YEL - BLK =	115V ±2%
DCR		@ 20°C, YEL - RED =	0.280 Ω ±20%
HIPOT		PRIMARY - CORE	2000V, 60Hz, 1 SEC

**HAMMOND
MANUFACTURING™**

ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE				170J
CHOKE				
NO	DATE	REVISION	DWG. BY	
0	10/22/13	RELEASED. C.I.	CORINA ILIE	
			DATE	
			10/22/13	
			DIM IN(X)MM()	