
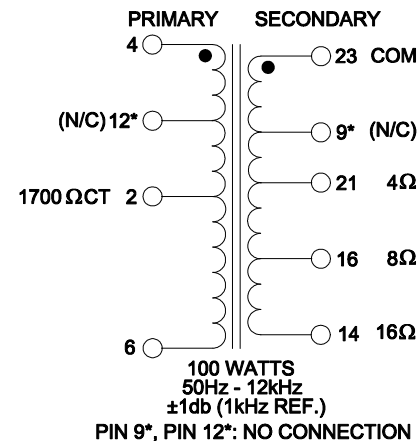


DIMENSIONS:

A	3.750" ±0.063
B	3.125" ±0.063
C	4.010" ±0.125
D	3.125" ±0.063
E	2.500" ±0.063
F	2.268" ±0.063
G	0.219" ±0.015
H	0.394" ±0.031

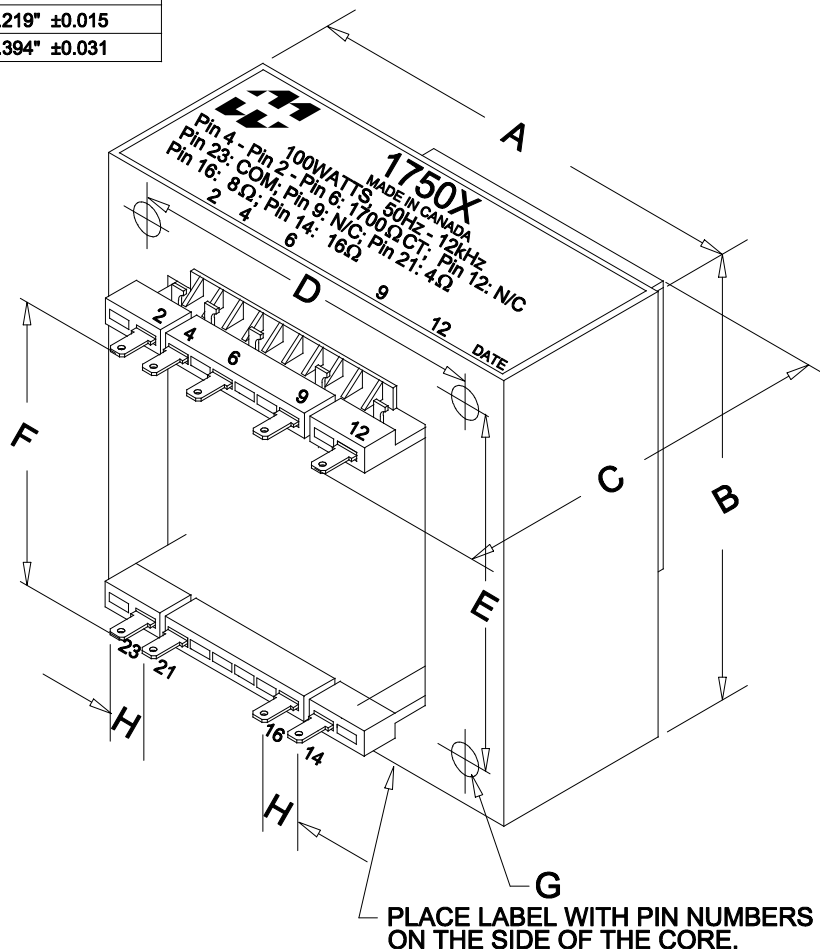

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 240V, 400Hz, PIN 4 - PIN 6	15mA Max.
Sec. N.L.V	@ 240V, 400Hz, PIN 4 - PIN 6	
	PIN 4 - PIN 2 = PIN 2 - PIN 6 =	119.9V ±2%
	PIN 23 - PIN 21 =	11.99V ±2%
	PIN 23 - PIN 16 =	16.95V ±2%
	PIN 23 - PIN 14 =	23.68V ±2%
POLARITY	PIN 4, PIN 23	ADDITIVE
DCR	@ 20°C, PIN 4 - PIN 2 =	16.58 Ω ±20%
	@ 20°C, PIN 2 - PIN 6 =	16.04 Ω ±20%
	@ 20°C, PIN 4 - PIN 6 =	32.58 Ω ±20%
	@ 20°C, PIN 23 - PIN 21 =	0.130 Ω ±20%
	@ 20°C, PIN 23 - PIN 16 =	0.170 Ω ±20%
	@ 20°C, PIN 23 - PIN 14 =	0.230 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 04/28/20	MANUFACTURING™ 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: OUTPUT TRANSFORMER	DWG. NO. 1750X
			DATE: 04/28/20	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

PH # (519) 886-6181
FAX # (519) 886-9540